Access Control Hardware

PRICE LIST

Book No. 14

Effective January 1, 2006

SDC

SECURITY DOOR CONTROLS

TABLE OF CONTENTS

(1) Documentation

Online System Wizard & Product Manager . . . . . i--vi
Warranty 1
Sales Policy 1
System Design & Engineering Policy 2
Locking Systems Reference Drawings
Basic Component Considerations 2
Communicating Bathroom 3
Interlock - Both doors normally unlocked 4
Mantrap - Both doors normally locked 4
Mantrap - 1 door locked 1 door unlocked. 5
Elevator Lobby Door System 5

(2) Stand Alone Access Controls

917, 925, 928 Keypads. 6
930 Vandal Res. & Weatherized Keypads 7
950 Prox & Keypad Reader 8

(3) Stand Alone & PC Based Locksets

E72 Civic Digital Cylindrical Lockset 9
E72 EntryCheck™ Prox/PIN Cylindrical Lockset . . . 10
E73 EntryCheck™ Prox/PIN Mortise Lockset 11
E74 EntryCheck™ Prox/PIN Exit Device Interface . . 11

(4) PC Based Access Control

E3 Card Access System 12,13

(5) Electrified & Actuator Controlled Locksets

PTH Power Transfer Hinge. 14
7000-DF Door Core Drill Kit 14
7200 Cylindrical Lockset. 15
7800 SELECTRIC™ Mortise Lockset 16,17
7500 HiTower® Actuator Controlled Lockset . . . 18,19

(6) Electric Bolt Locks

110, 210, 160, 260 Mortise Bolt Locks 20
1091A, 1291A, 1190A, 2090A, PB2090A
Narrow Mortise Bolt Locks 20
180, 280 Surface Bolt Locks. 21
290 Cabinet Lock 21
GL160A, GL260A Gate Locks 22

(7) Electromagnetic Locks

1510, 1570, 1580 EMLock 24,25
Mounting Kits, Architectural Housings 26
Installation Tools 26
Universal & Concrete Mounting Brackets. 27
AR Armature Mounting Bracket 27
Filler Plates, Angle Brackets. 28
1575 Gate EMLock®. 29
1583 Micro EMLock® 29
1591 Mortise EMLock®. 29
1561, 1562, 1565, 1566 Hi/Shear EMLock 30
1561S, 1561TJ, 1562SC Hi/Shear EMLock 31

(8) Delayed Egress Locks & Exit Devices

1511S/T Exit Check, Integrated 32,33
1581S Mini Exit Check, Integrated 34
101V Exit Check, Wall Mount 35
6000 Exit Check Exit Device 36,37
Delayed Egress Accessories 38
Remote Controls & Annunciators 38

(9) Electric Strikes

50 Electric Strike. 40
30 & 70 Electric Strike 41

(10) Power Supplies & Door Control Modules

600 Power Supplies 42
Door Control Modules. 43
AC Transformers. 44
Power Supply Lock Capacity Chart 45,46

(11) Key & Exit Switches

700, 800 Key Switches 47
400 Exit Switches 48,49

(12) Exit Sense Bars & REX Kits

PSB560 Sure Exit® Sense Bar. 50
MSB550 REX Bar. 50
500 Series Exit Device REX Switch Kits 51

(13) Accessories

491 Break Glass Emergency Release 52
15 Under Desk Switch 52
400 Wall Mount LED Plate 52
400 Communicating Bathroom Controls. 52
10TD Mini Timer 53
PT, PTH Power Transfer Devices. 53
MD-31 PIR Request-To-Exit 53
DPS, MC Door Status Switches 53

(14) Control Consoles

DT, TCC, RCC Control Consoles 54

Some products in this price book are protected by one or more of the following U.S. Patents. Foreign Patents are not shown.

4,021,065	4,099,752	4,596,411
4,609,910	4,623,178	4,623,181
4,634,155	4,641,867	4,826,223
4,986,581	5,000,497	5,006,723
5,033,779	5,141,271	5,376,910
5,429,399	5,525,880	5,564,228
5,876,073	6,363,363	6,363,763

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

www.SDCsecurity.com

Online System Design Wizard
and
Product Manager

Las Vegas 2005
NPS
Product Achievement Award for: Business Services
SIA NEW PRODUCT SHOWCASE

SDC has created the most advanced manufacturers website in the industry. SDC customers and industry professionals can not only specify products and create systems, but also have the ability to save, manage, modify, quote and share product and access control system information with other professionals

System Design Wizard

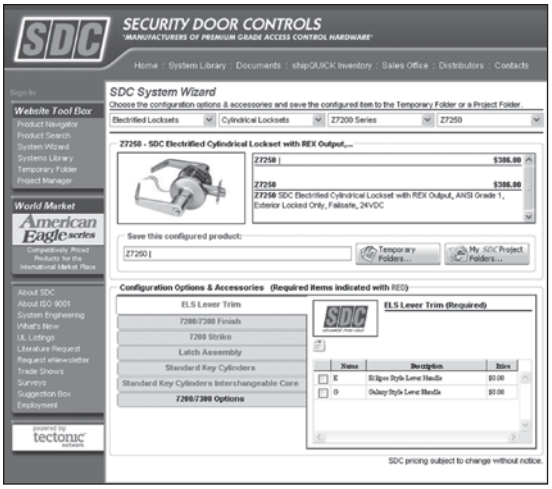

- Model Number Generator
- Automated Pricing
- Automated Document Retrieval
- Temporary Folder to Sort by Product Type or Door Opening

Product Manager

- Save Multiple Project Folders Online
- Organize Subfolders by Door Opening
- Generate and Send Quotes
- Generate and Send Request-For-Quote
- Share and Download Project Reports
- Share and Download Project Documents
- Share and Download Project Quotes

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

Online Project Manager

From the System Wizard, save individual products directly into Product Manager. From the Temporary Folder, save multiple products into Product Manager

Product Documents are automatically saved into the Project Manager with the product specifications

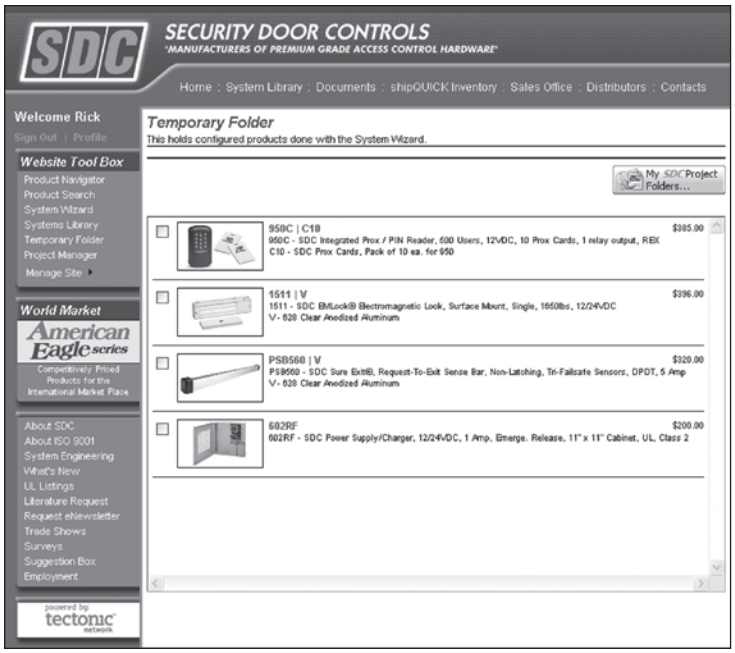
SECURITY DOOR CONTROLS
"MANUFACTURERS OF PREMIUM GRADE ACCESS CONTROL HARDWARE"
Home : System Library : Documents : shipQUICK Inventory : Sales Office : Distributors : Contacts
Welcome Rick
Sign Out | Profile
Website Tool Box
Product Navigator
Product Search
System Wizard
Systems Library
Temporary Folder
Project Manager
Manage Site
World Market
American Eagle series
Competitively Priced Products for the International Market Place
About SDC
About ISO 9001
System Engineering
What's New
UL Listings
Literature Request
Request eNewsletter
Trade Shows
Surveys
Suggestion Box
Employment
tectonic
Temporary Folder
This holds configured products done with the System Wizard.
My SDC Project Folders...
950C | C10
950C - SDC Integrated Prox / PIN Reader, 600 Users, 12VDC, 10 Prox Cards, 1 relay output, REX
C10 - SDC Prox Cards, Pack of 10 ea. for 950
$385.00
1511 | V
1511 - SDC EMLock® Electromagnetic Lock, Surface Mount, Single, 1650lbs, 12/24VDC
V - 628 Clear Anodized Aluminum
$396.00
PSB560 | V
PSB560 - SDC Sure Exit®, Request-To-Exit Sense Bar, Non-Latching, Tri-Failsafe Sensors, DPDT, 5 Amp
V - 628 Clear Anodized Aluminum
$320.00
602RF
602RF - SDC Power Supply/Charger, 12/24VDC, 1 Amp, Emerge. Release, 11" x 11" Cabinet, UL, Class 2
$200.00

Saved documents include:

- Datasheets
- Installation Instructions
- Templates
- Price List Page

Project Manager Tools includes

- Project Organizer
- Reports, RFQ and Quote Generator
- Project Packet Generator

Project Organizer

Similar to a computer filing system, users can create new folders and move, copy, modify and delete folders

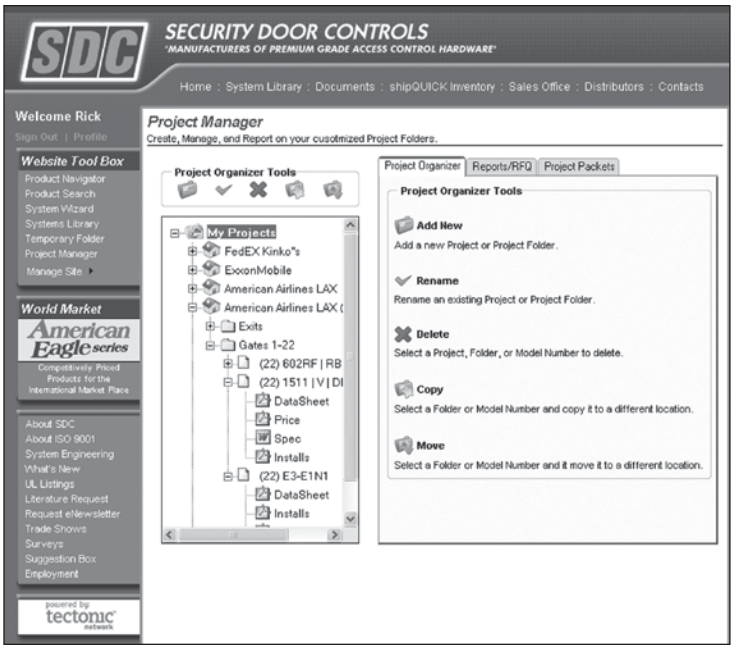

Las Vegas 2005
NPS
Product Achievement Award for: Business Services
SIA NEW PRODUCT SHOWCASE

Organize projects and sub-folders by: •Building •Location •Door Opening •Product Type

www.SDCsecurity.com

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Online Request - for - Quote - Generator

System Integrators, installing dealers and contractors may generate and send RFQ's directly to SDC Distributors

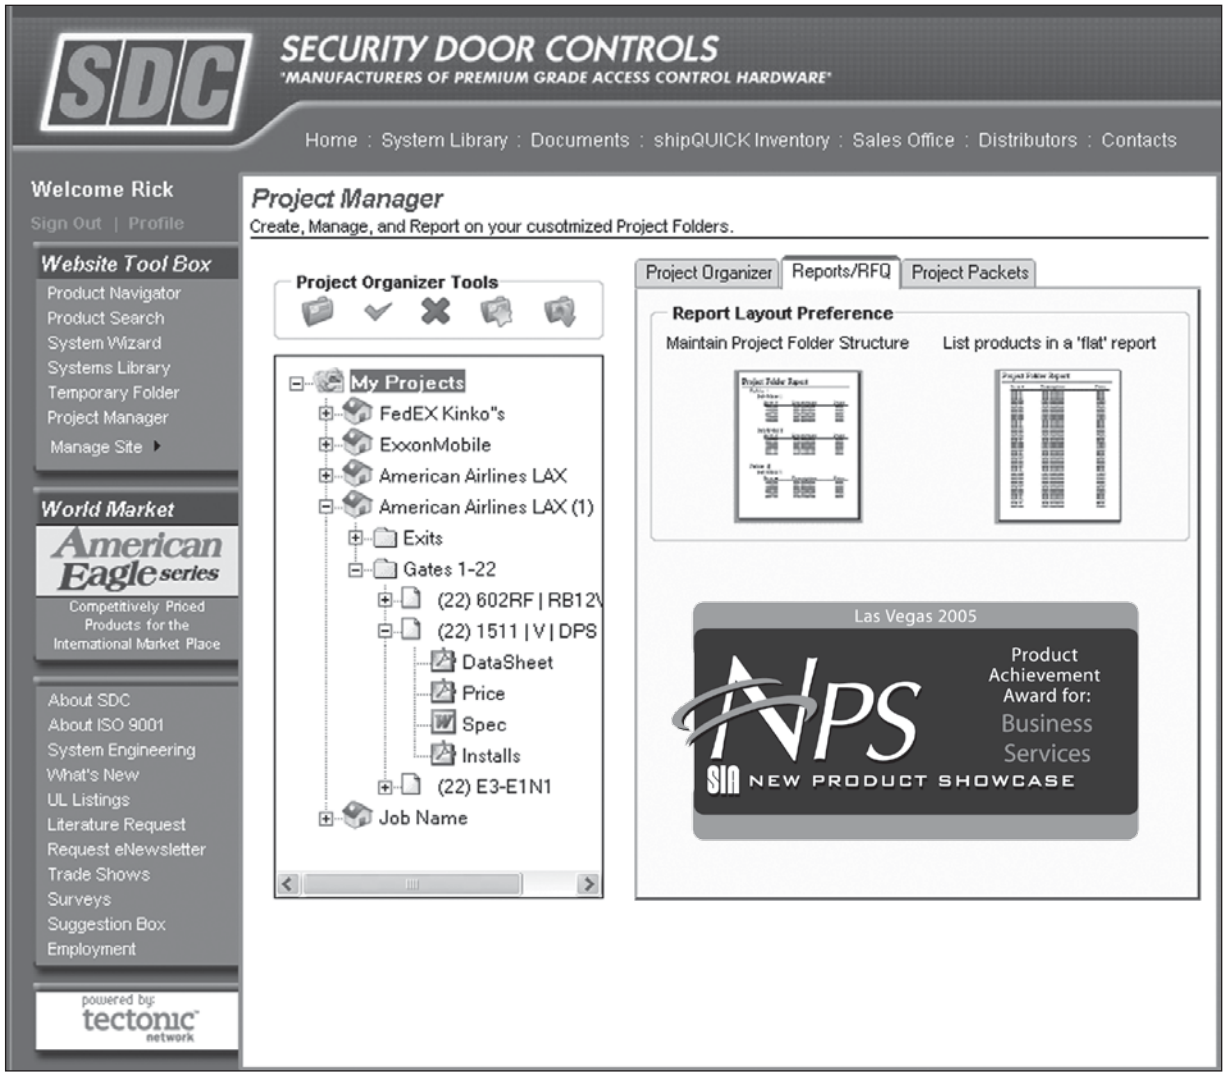

To open RFQ's Documents:

- Select the Project for which you desire to request dis tributor pricing
- Select a document icon to generate a Flat or Structured RFQ and send an email link to a distributor

www.SDCsecurity.com

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

Online Request - for - Quote - is generated and sent to distributor

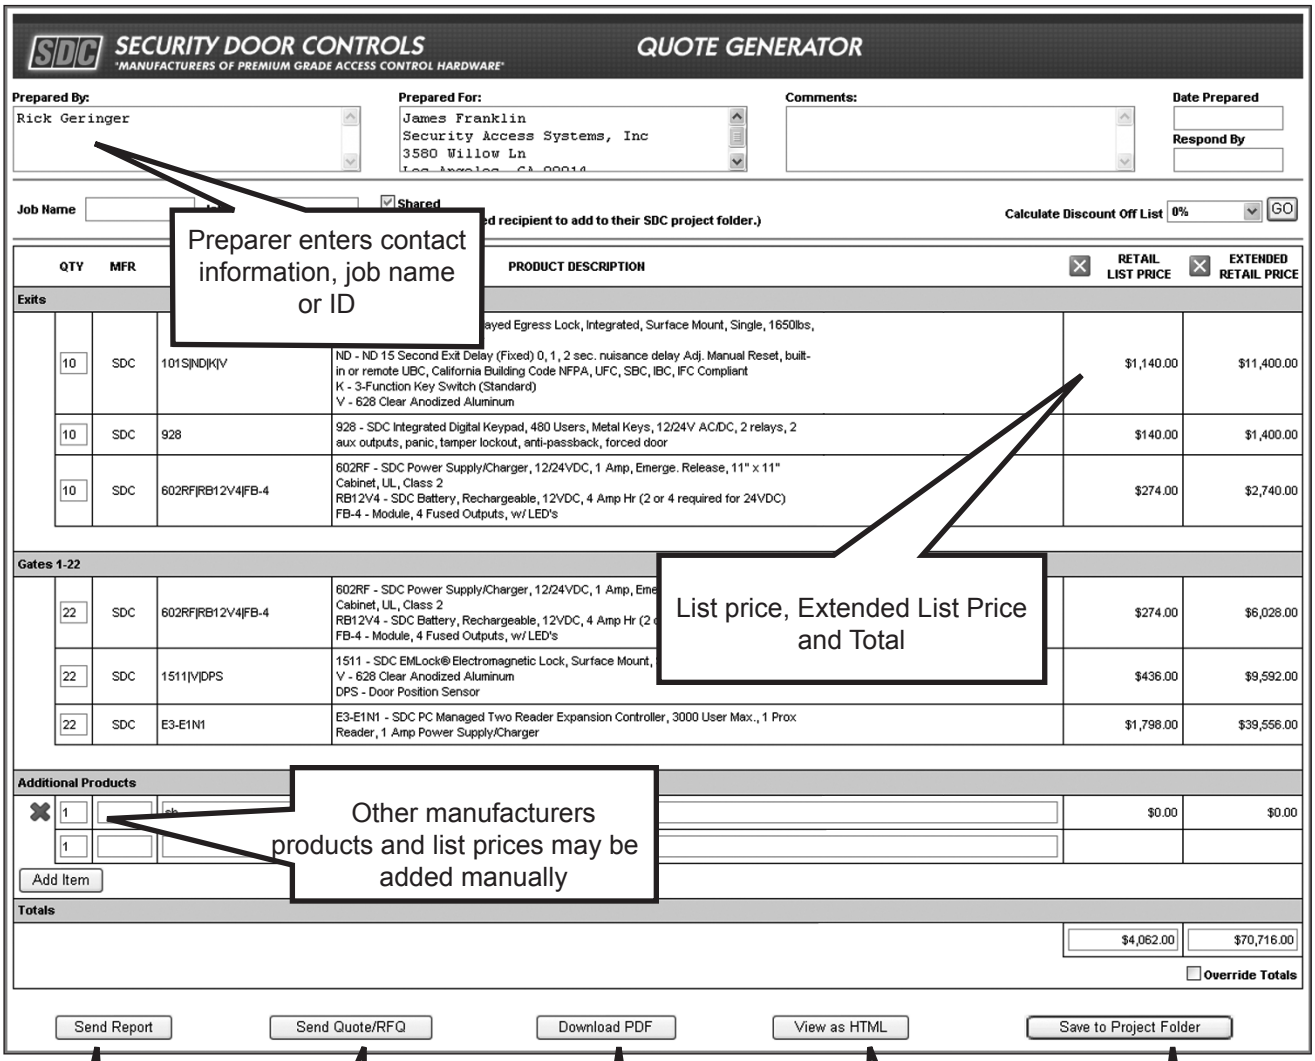

www.SDCsecurity.com

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Distributor Quotes and RFQ Response

The Distributor may download the RFQ to his own Project Manager and enter pricing and return the RFQ back to the sender.

The Distributor may generate quotations and reports for his own use from Project Manager

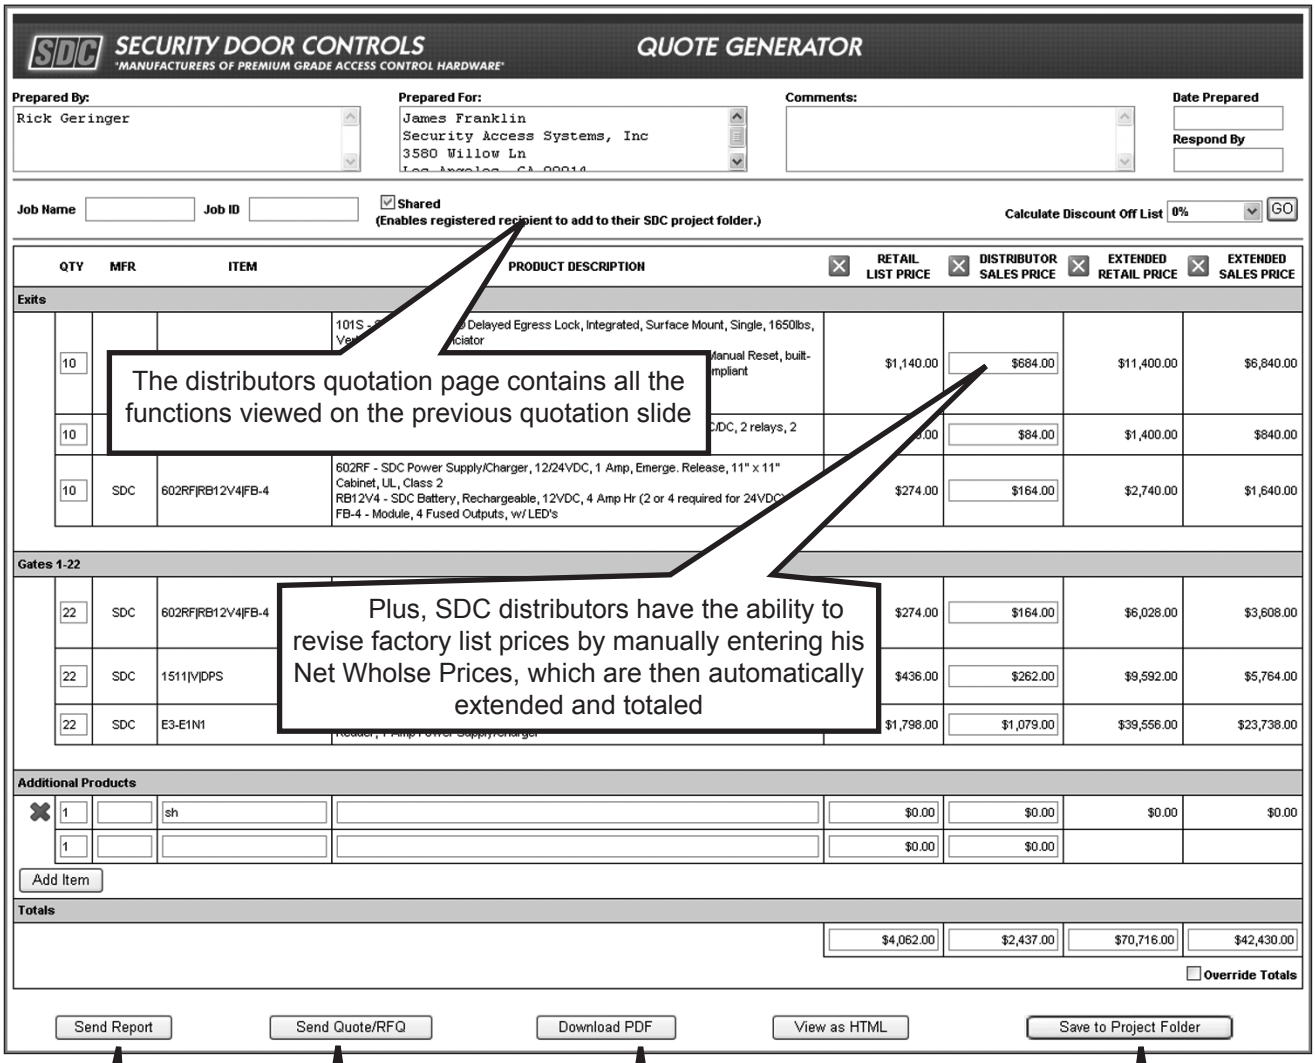

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

Project Reports

- Similar to quotation less pricing
- Generate Flat Reports

OR

- Structured reports organized by individual door opening

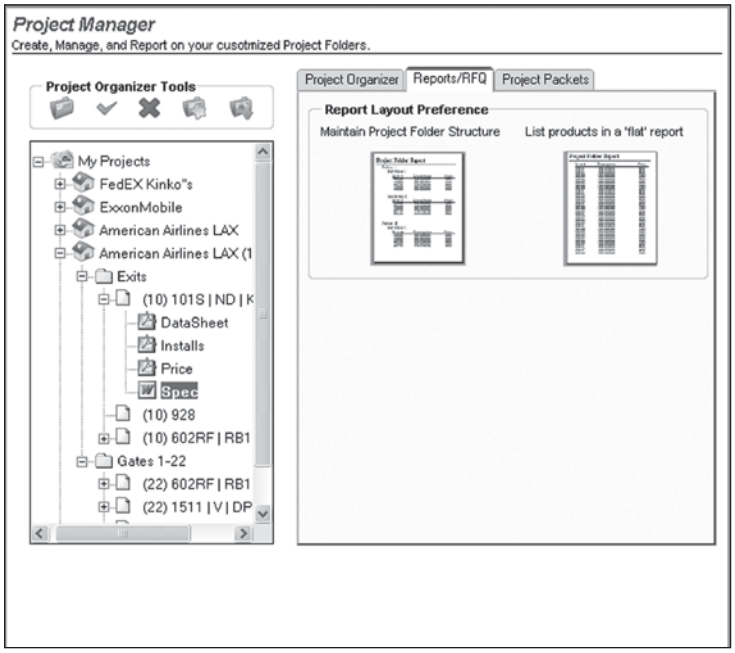

Project Document Packets

Generate and Share Project Document Packets

Select 1 or more documents for each product, including:

- Datasheets
- Installation Instructions
- Templates
- Price List Page

Send a link for project packet to multiple recipients

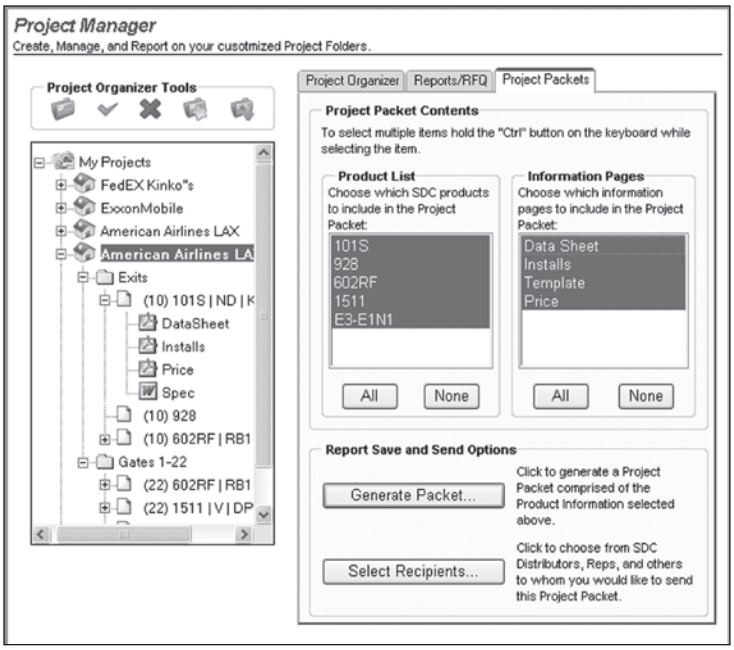

www.SDCsecurity.com

Las Vegas 2005
NPS
SIA NEW PRODUCT SHOWCASE
Product Achievement Award for: Business Services

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

LIMITED WARRANTY

We warrant that all products manufactured and sold by us are free from defects in material and workmanship and those products of our design are fit for the purpose intended by us when properly installed in accordance with factory instructions.

Electromagnetic locks are warranted for the life of the product. The warranty for delayed egress locks and all other products and finishes is for a period of twelve (12) months after the product is first put into use, or not more than fourteen (14) months after date of first shipment, whichever shall expire first. SDC is not responsible for changes of Oil Rubbed Bronze (613/US10B) finish, which is a living finish designed to change appearance through daily use.

The extent of our liability for breach of such warranty, when such is shown to our satisfaction, shall be limited to a functionally equivalent replacement, or repair of such product, or part thereof, at SDC's sole discretion, when returned, delivery prepaid, to SDC. We shall not, except to the extent this limitation may be precluded by law, be liable for inconvenience, labor costs, damages to other property, injury or any other consequential damages resulting directly or indirectly from any product defect or breach of this warranty. This warranty is limited to the original End User purchaser, is not transferable and shall not apply to maintenance, wear and tear caused by normal use, altered product, abuse or negligence.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IS IN LIEU OF ALL OTHER WARRANTIES OF FITNESS AND MERCHANTABILITY.

SALES POLICY

Terms: A minimum purchase of $2500.00 annually is required to maintain an open account with Security Door Controls.

Additional Terms: 2% - TEN (10) DAYS. Net thirty (30) days from date of invoice. Interest at 1-1/2% per month will be charged on unpaid balances beyond thirty (30) days. Orders received from 60+ day accounts will not be entered until account is current. It is understood that you may use your normal purchase order or other order forms in placing orders. However any such forms shall be used for convenience only and any terms or provisions which may be contained therein inconsistent with, or in addition to, those contained in our then current Acknowledgment to Customer form or other terms or provisions contained herein shall have no force or effect whatsoever. Custom material or wiring diagrams requires 50% deposit. At SDC's discretion, orders in excess of $1500 net will be acknowledged by product category and department, and shipped on an "as ready" basis unless customer purchase order specifically states "Do not ship before _____," and "No partial shipments."

Prices: Prices are subject to change without notice. No prices are guaranteed. All shipments will be made at prices prevailing at time of shipment. Errors or omissions in pricing are subject to correction.

Pricing Policy: Shipments must be accepted within sixty (60) days after receipt of the order. Contracts extending beyond this period are subject to prices in effect at the time of shipment.

Minimum Order: Our minimum net invoice charge is $100 net.

Acceptance: We reserve the right to decline an order, in whole or in part, when the price, quantity or assortment of goods is not satisfactory to us.

Change in Orders: A charge of $20.00 will be applied to each change on any order after said original order has been previously acknowledged by SDC, plus a cost incurred by manufacturing at point of change.

Cancellations: A charge of $40.00 will apply in addition to any cost incurred by us for any cancellation made after our acknowledgment is issued. Custom architectural housings are non-cancelable. Orders for custom architectural housings, custom parts, special and optional plated finishes are non-cancelable.

Freight: All goods are invoiced F.O.B. SECURITY DOOR CONTROLS. When delivered to the transportation company the shipments become the property of the purchaser, who assumes the risk of loss or damage in transit. All ground shipments will be made by United Parcel Service (UPS).

Returned Goods: Any defects or errors for which we are responsible will be promptly rectified. Approval for return of merchandise must be requested of us, and when granted the return authorization number must be displayed on all packages returned. Material found suitable for resale without reconditioning will be credited to customer's account less a handling and reprocessing charge of 35% of the net material value. Further charges will be assessed on material requiring rework to return it to saleable condition. Obsolete products will not be accepted for return. Custom products, special finish, options, size or pre-assembly configuration are considered special and are not returnable for credit. Incoming transportation charges are to be prepaid by the Buyer. Credits for material returned will have 2% deducted to cover the cash discount allowance on the original invoice.

Back Charges: We are not responsible for, do not authorize, and will not accept any charges for the cost of any labor or material incurred by anyone other than Security Door Controls for any installation, repair, service or replacement unless incurred with our prior written consent and agreement.

Product Changes: SDC reserves the right to modify, change, or discontinue any components as required.

Shortages/ Discrepancies: Must be made within ten (10) days after receipt of material. (The original invoice number will be required).

Templates: It shall be the customer's responsibility to check all templates requested from SDC for suitability for proper door and frame preparation. Direct mail requests for the door and frame supplier will not release this customer of this responsibility. Duplicates will be mailed to distributors.

Arbitration and Governing Law: In the event of a dispute or controversy, or differences, which may arise between parties, any claim shall be settled by arbitration. The arbitration shall take place in California under the rules of the American Arbitration Association. The validity, interpretation, and performance of this agreement shall be controlled by and construed under the laws of the state of California, United States of America.

Acceptance: We reserve the right to decline an order, in whole or in part, when the price, quantity, or assortment of goods is not satisfactory to us.

Note: SDC complete sales policy as stated in our price book prevails at all times.

Price List Effective January 1, 2006

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

CUSTOM SYSTEM DESIGN

Security, Life-Safety and Access Control. They demand the best, in planning, products and operation. So it's only good sense to work with a complete product package, and to begin with an expertly prepared, custom engineered design package from SDC. Detailed to your needs, one entrance or a complex multi-entrance system.

Every professional in the field knows all too well the usual problems. Wiring specs and wiring diagrams don't match up, components are improperly planned out or missing, projects slow down and costs start escalating.

Security Door Controls is prepared to assist you with a complete System Design Folder which eliminates any problems with component compatibility, system operation or wiring installation.

We provide what your particular job requires in electrical drafts, instructions and data. It offers a great advantage for you, with time saved, a faster, easier, better job in every way.

General instructions. Job name. Supplier. SDC reference number and drawing numbers for easy reference when technical support is needed. System operation: a detailed outline of the complete operation. A full list of components with individual instruction data for each, conduit layout indicating quantity and gauge of wires. Point-to-point wire diagrams of all component connections.

All necessary data is a matter of record. In short, whatever that job requires in equipment, technical understanding or assistance, at the office or in the field, will be detailed in your SDC System Design Folder.

*SDC fees vary according to requirements.

ENGINEERING POLICY

Engineering services are available for special system design and documentation.

All requests must be submitted in writing with all detailed requirements before final quotation. Any alterations or omissions must also be submitted in writing and are subject to additional quotation.

SDC assumes no responsibility for information exchanged by telephone regarding estimates or product suitability for verbally expressed systems. Fax requests will speed up the process and eliminate misunderstandings.

A non-cancelable purchase order for engineering is required before any engineering may proceed.

A signed Engineering Policy form is required for all system drafts.

BASIC COMPONENT CONSIDERATIONS FOR A SINGLE DOOR SYSTEM

1. **LOCKING DEVICE**
   - Electromechanical Bolt Lock
   - Electromagnetic Lock
   - Electric Strike
   - Electric Mortise Lock
   - Electrical Cylindrical Lock
   - Delayed Egress Lock
2. **ACCESS CONTROL**
   - Card Reader
   - Digital Keypad
   - Key Switch
3. **EXIT SWITCH**
   - Push Switch
   - Motion Detector
   - Request to Exit Push Bar®
4. **REMOTE CONTROL**
   - Desk Switch
   - Control/Monitoring Panel
   - (lock status sensors required)
5. **POWER SUPPLY AND DOOR CONTROL MODULE(S)**
   A 600 series power supply and time delay modules provide delayed re-locking, interface capability with alarm systems and access control components plus system documentation.

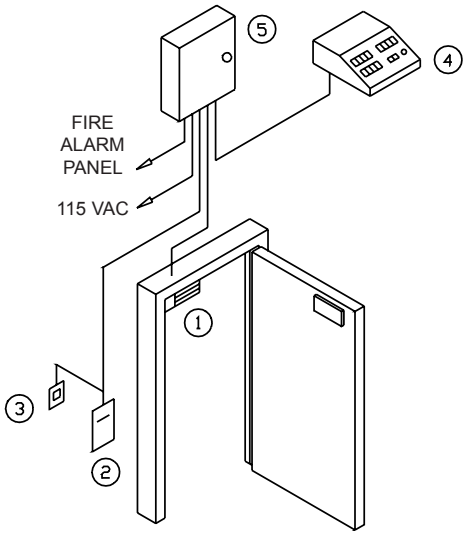

DOOR HANDS

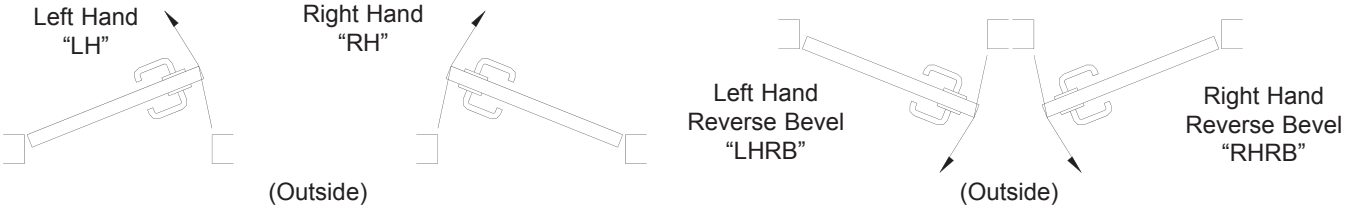

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

COMMUNICATING BATHROOM EMLOCKS®

APPLICATION

Single hospital bathroom shared by two patient rooms.

SYSTEM OPERATION

Both doors must be closed to lock.

Activating CB401A (B) locks both doors.

Activating CB401A (B) again unlocks both doors.

When doors are locked, activating either CB401B (C) emergency release will unlock both doors.

Both doors will unlock automatically via signal from fire panel.

SYSTEM COMPONENTS

(A) Fail Safe locks with door position switch. Example: 1511-DPS

(B) CB401A System activation push switch.

(C) CB401B Emergency release push switch to be mounted above each door. CB701B key switch optional.

(D) 631RF-CR Power Supply with Fire Panel Tie-In.

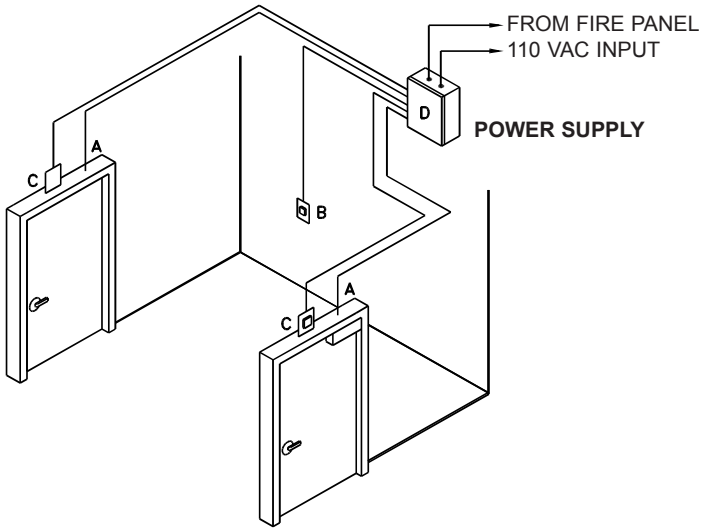

COMMUNICATING BATHROOM WITH HiTOWER® LOCKS

APPLICATION

Single hospital bathroom shared by two patient rooms.

SYSTEM OPERATION

Both doors must be closed to lock.

Activating CB402A (B) locks both doors.

When doors are locked, turning either inside door lever unlocks both doors.

CB401-A
CB402-A

CB401-B
CB402-B

When doors are locked, activating either CB402B (C) emergency release will unlock both doors.

Both doors will unlock automatically via signal from fire panel.

SYSTEM COMPONENTS

(A) Fail Safe locks with door position switch or REX. Examples: 7550-9, 7850-DS, or 7850-R

(B) CB402A System activation push switch.

(C) CB402B Emergency release push switch to be mounted above each door. CB702B key switch optional.

(D) 631RF-LR Power Supply with Fire Panel Tie-In.

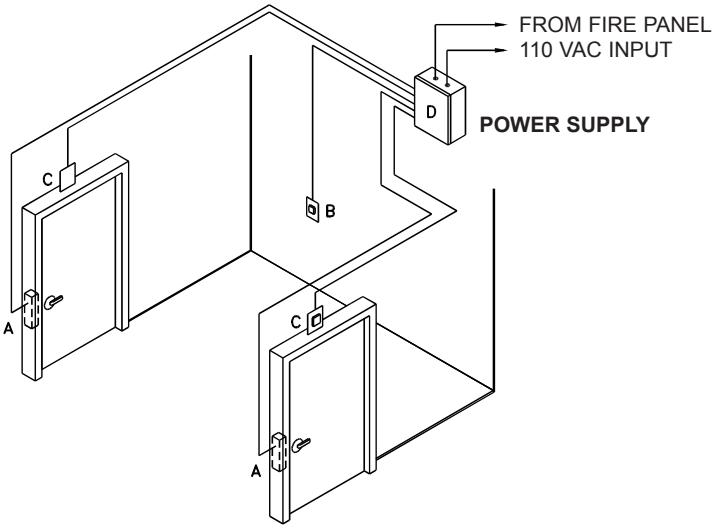

Price List Effective January 1, 2006

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

2 DOOR INTERLOCK "A"

3 and 4 Door Interlock Available

APPLICATIONS
Darkrooms, laboratories, clean rooms, x-ray or other treatment rooms, light and air trap rooms and more.

OPERATION
All doors remain closed and unlocked. Opening either door causes the second door to lock until the opened door returns to the closed position. A key switch is provided for system activation and deactivation.

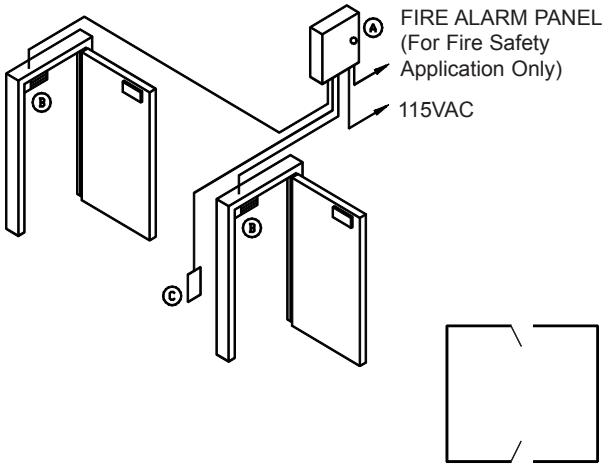

SYSTEM COMPONENTS SHOWN
(A) 631RFA-UR2-INTA Power Supply
(B) 1511-DPS EmLock
(C) 701 System On-Off Key Switch

ALTERNATE "B" COMPONENTS
Refer to literature for lock specifications.

EmLocks	Electric Strikes	HiTower	Bolt Locks
1581-DPS	★ 51-A-LBM	7530-L	FS23M-9
1565-DPS	★ 52-B-LBM	7830-DS	1190A-9
1511-DPS-TJ	★ 52-C-LBM	★ 7560-L	1091A-9

★ Indicates Fail Secure

DOOR LAYOUT 1

NOTES: Consult factory for 3 and 4 door interlocks. Operation and configurations shown may be altered for specific job application needs. Consult factory for more information. Component changes may require system design/schematic changes. Consult factory.

2 DOOR MANTRAP "B"

3 and 4 Door Mantrap Available

APPLICATIONS
Laboratories, clean rooms, money counting rooms, restricted dark rooms, computer rooms and more.

OPERATION
Both doors are normally closed and locked. Unlocking either door causes the other to be incapable of being unlocked. A key switch (D) is provided for system activation and deactivation. Doors are accessed by Digital Keypad (C).

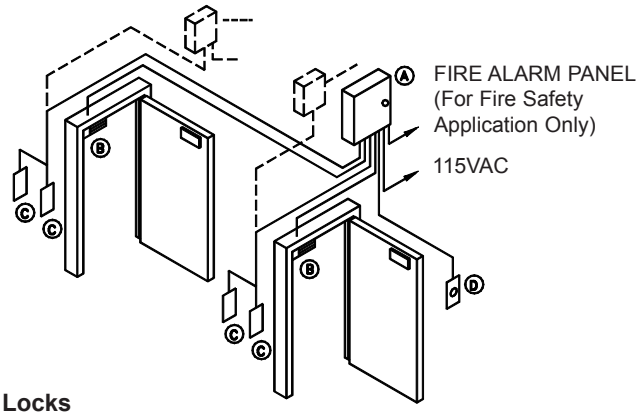

SYSTEM COMPONENTS SHOWN
(A) 631RFA-UR2-MAN-B
(B) 1511-DPS-BAS or 1511-BAS
(C) 917 Digital Entry Momentary Access
(D) 701 Key Switch ON-OFF

ALTERNATE "B" COMPONENTS/LOCKING DEVICE
Refer to literature for lock specifications.

EmLocks	Electric Strikes	HiTower	Bolt Locks
1565-BAS-DPS	★ 51-A-LCM-LBM	7530-S	FS23M-69
1511-BA-DPS-TJ	★ 52-B-LCM-LBM	★ 7560-S	1190A-69
		7830-DS	

★ Indicates Fail Secure


DOOR LAYOUT 1

ALTERNATE "C" COMPONENTS/ACCESS CONTROL - Refer to literature for switch specifications.

Key Switch	Desk Switch	Keypad	Card & Keypad Reader
702	15-2	928	950
702N		930	
802		931-KP	
802N		936-KP	

ALTERNATE "D" COMPONENTS/ON-OFF SWITCH - Refer to literature for switch specifications.

Desk Switch	Push Switch
15-1 ON-OFF	401 ON-OFF

NOTES: Consult factory for 3 and 4 door mantraps. Operation and configurations shown may be altered for specific job application needs. Consult factory for more information. Component changes may require system design/schematic changes. Consult factory. Consult factory for Control and Monitoring Panel applications.

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

2 DOOR INTERLOCK "C"

3 and 4 Door Mantrap Available

APPLICATIONS
Laboratories, clean rooms, money counting rooms, restricted dark rooms, computer rooms and more.

OPERATION
Door 1 is locked, Door 2 remains unlocked. When Door 1 is unlocked, Door 2 locks. When Door 2 is opened, Door 1 cannot be unlocked. A key switch (D) is provided for system activation and deactivation. Door 1 is accessed by Digital Keypad.

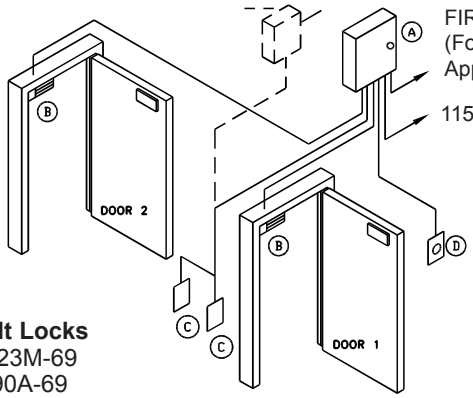

SYSTEM COMPONENTS SHOWN
(A) 631RFA-UR2-INTC Power Supply
(B) 1511-DPS-BAS EmLock
(C) 917 Digital Entry Momentary Access
(D) 701 Key Switch ON-OFF

ALTERNATE "B" COMPONENTS/LOCKING DEVICE
Refer to literature for lock specifications.

EmLocks	Electric Strikes	HiTower	Bolt Locks
1565-BAS-DPS	◆ 51-A-LCM-LBM	7530-S	FS23M-69
1511-BA-DPS-TJ	◆ 52-B-LCM-LBM	7830-DS	1190A-69
		◆ 7560-S	

◆ Indicates Fail Secure


DOOR LAYOUT 1

ALTERNATE "C" COMPONENTS/ACCESS CONTROL - Refer to literature for switch specifications.

Key Switch	Desk Switch	Keypad	Card & Keypad Reader
702	15-2	928	950
702N		930	
802		931-KP	
802N		936-KP	

ALTERNATE "D" COMPONENTS/ON-OFF SWITCH - Refer to literature for switch specifications.

Desk Switch	Push Switch
15-1 ON-OFF	401 ON-OFF

NOTES: Consult factory for 3 and 4 door interlocks. Operation and configurations shown may be altered for specific job application needs. Consult factory for more information. Component changes may require system design/schematic changes. Consult factory. Consult factory for Control and Monitoring Panel applications.

ELEVATOR LOBBY DOOR SYSTEM

OPERATION
Many high-rise building tenants that occupy a complete floor may have a problem when it comes to securing their elevator lobby doors. These doors lead through office space to the emergency exit stairwell doors. People must have free access to the stairwell at all times. This leaves some companies vulnerable to transient traffic, theft and loss of proprietary information. SDC manufactures a lobby door security system which meets both fire life safety and security needs.

The elevator lobby doors are normally closed and locked by SDC Model Z7850 HiTower Fail-Safe lockset. The intercom system provides two-way communication to the security desk. When a call is placed from the elevator lobby, the security desk personnel can momentarily release the SDCZ7850 lockset by using the SDC Desk Console (Model DTMO-1). If there is no response from the security desk personnel, the person in the elevator lobby can depress the red exit palm push button switch (SDC Model 432RKRU). When the red exit switch is activated, the SDC Model Z7850 HiTower lock will immediately release and an alarm will sound in the elevator lobby and the security desk console.

An authorized person can reset the HiTower lockset, turn off the alarm and return the system to the normal secured operation by using the built-in Key Reset on the red exit palm bush button switch. Personnel may always obtain access to the offices by use of an access control system. Egress from the office to the lobby is accomplished by rotating the inside lever.

A SDC Series 600 Power Supply will provide 24VDC power to the HiTower locks, Security Desk Console and alarm. The emergency control relay within the power supply will turn off the system power when activated by a building fire alarm device. The SDC Model Z7850 lockset will release immediately when power is removed. A System Engineered package will be provided by Security Door Controls.

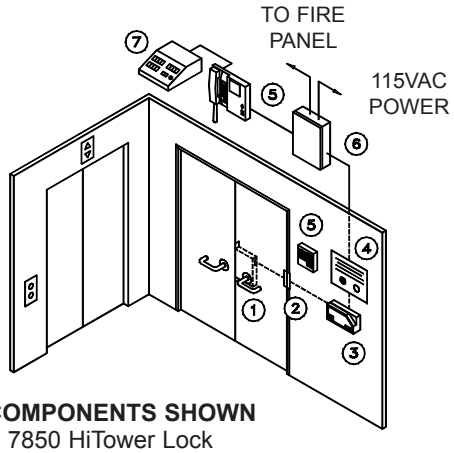

SYSTEM COMPONENTS SHOWN
(1) SDC-Z 7850 HiTower Lock
(2) SDC-PTH-4 Power Transfer Hinge
(3) 950 Stand Alone Proximity Reader
(4) SDC-APB 1000 Sign with Release Push Switch and Alarm
(5) Intercom/CCTV by others
(6) SDC-631RF Power Supply
(7) SDC-DT, RCC or TCC Door Control Console and Annunciator

NOTE: All system field wiring is to be installed in accordance with all local building codes and the approval of the local authority having jurisdiction. All wiring is to be done by a licensed Access Control or Fire and Life Safety specialist.

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

917 INDOOR EntryCheck™ JK LIST

917U 120 user codes, 1 to 6 digits in length, programmable for individual or simultaneous control of 1 relay output and 4 voltage outputs momentary, timed or latching. Automatic time-out, REX input, duress alarm, forced entry alarm, 3 LEDs. **140.00**

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC
Current: 20 mA @ rest, 120 mA maximum
Outputs: Relay 1 - SPDT, 6 Amps @ 30VDC.
Outputs 1,2,3,4 - Switch to common, 500mA @ 12VDC

SPECIFY FINISH Add to List

U	630 Stainless Steel *(standard)*	**N/C**
C	605 Bright Brass	**40.00**
D	606 Dull brass	**40.00**
H	613 Oil Rubbed Bronze	**40.00**
P	625 Bright Chrome	**40.00**

OPTIONS Add to List

TR12 Plug in power supply *(optional)* **68.00**
120 VAC primary, secondary screw terminals with ground terminal
Output 1: Fused unregulated 12VDC @ 780mA
Output 2: Regulated 12VDC @ 150mA

925 OUTDOOR EntryCheck™ JK LIST

925 Outdoor keypad with 480, 1-6 digit user codes for activation of 2 relay outputs programmable to activate separately or simultaneously for timed or latching applications. Two solid state outputs are programmable to signal two of the following: forced entry, door ajar, keypad lockout, alarm shunt, request-to-exit, relay 1 disable or keypad active. Additional features include timed anti-passback and two LEDs. **330.00**

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC
Current: 10 mA typical, 150 mA maximum
Outputs: Relay 1 - Form “C”, 5 Amps @ 24VDC
Relay 2 - Form "C", 1 Amp @ 24 VDC
Outputs 3 and 4 - Switch to common, 100mA @ 30VDC
Operating Temperature: -20 degrees to +130 degrees F
Operating Humidity: 5% to 95% non-condensing
Housing: 4"W x 5.5"H x 3"D

928 EntryCheck™ JK LIST

928 Keypad with 480, 1-6 digit user codes for activation of 2 relay outputs programmable to activate separately or simultaneously for timed or latching applications. Two solid state outputs are programmable to signal two of the following: forced entry, door ajar, keypad lockout, alarm shunt, request-to-exit, relay 1 disable or keypad active. Additional features include timed anti-passback and two LEDs. **140.00**

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC
Current: 10 mA typical, 150 mA maximum
Outputs: Relay 1 - Form “C”, 5 Amps @ 24VDC
Relay 2 - Form "C", 1 Amp @ 24 VDC
Outputs 3 and 4 - Switch to common, 100mA @ 30VDC
Operating Temperature: -20 degrees to +130 degrees F
Operating Humidity: 5% to 95% non-condensing
Housing: 3"W x 5"H x 3"D

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

930 ENTRYCHECK™ INTEGRATED KEYPAD — MK

930Y

All electronics are built-in the narrow keypad. Features include: 5 button keypad, 6 user codes, 3-8 digits, Request -to- exit input, Anti-tailgating, 1 relay output, 2 voltage outputs, latching or momentary, 1 - 120 second timer, tamper alarm, keypad lockout, 100 mA @ 12/24V AC/DC.

MODEL	KEYPAD STYLE	
930Y	Black, illuminated (*standard*)	**210.00**

931 ENTRYCHECK™ KEYPAD and CONTROLLER — MK

931

KP-2U KP-4U



KP-3Y KP-3U

One master and six user codes 3 to 8 digits in length. Two SPDT relay outputs, momentary unlock and manual latching outputs, anti-tailgating, tamper alarm, REX input, non-volatile memory, 15 ft cable, 12/24V AC/DC

SPECIFY KEYPAD — LIST

MODEL	KEYPAD STYLE	
931 KP-2U	Stainless steel	**391.00**
931 KP-3Y	Black, illuminated	**471.00**
931 KP-3U	Black, with stainless steel face	**471.00**
931 KP-4U	Stainless steel	**580.00**

Two Keypads for Entry and Exit Control of One Door, or Entry Control of Two Separate Doors

MODEL	KEYPAD STYLE	
KP-2U x TWC-15	Stainless steel and 15ft. cable	**192.00**
KP-3Y x TWC-15	Black, illuminated and 15ft cable	**272.00**
KP-3U x TWC-15	Black, with stainless steel face and 15ft cable	**272.00**
KP-4U x TWC-15	Stainless steel and 15ft. cable	**356.00**

OPTIONS — Add to List

TWC-15	Replacement 15ft. Touchpad cable wiring	**60.00**
KP-3AP	Adapter plate for keypad mounting to single gang box	**35.00**

936 EntryCheck™ — MK LIST

NEW

936

KP-31U KP-41U

KP-31Y



KP-3AP

Keypad and PC managed Audit Trail, 500 user codes, temporary codes, 1 master code, 3 programmable outputs, tamper alarm, request-to-exit, anti-tailgating, manual or timed latching, restricted access input, PC programming/logging software, 12/24V AC/DC

MODEL	KEYPAD STYLE	
936 KP-31Y	Black, illuminated	**518.00**
936 KP-31U	Black, with stainless steel face	**518.00**
936 KP-41U	Stainless steel	**588.00**

Controller Specifications

931 Input: 250mA @ 12/24VAC/VDC
936 Input: 120mA @ 12/24VAC/VDC
Operating Temperature: -40° to +120° F

KP Touchpad Specifications

Operating Temperature: -40° to +120° F
Operating Relative Humidity: 100%
LED Indicators: Red and Green

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

950 EntryCheck™ STAND ALONE PROXIMITY ACCESS CONTROL — MK

The 950 EntryCheck™ is a stand alone access controller with a proximity reader and keypad for PIN entry that provides all the logic necessary to control a single door. All unit programming is performed by using the built-in keypad. Proximity cards, key fobs and PIN entries can be added and deleted with the keypad using the master code or programming card. The lock relay output can be set for 1-99 seconds. This weather resistant unit is easily surface mounted either inside or outside and an optional glass mounting kit is also available.

FEATURES:

- Programmable entry methods
  - PIN Code and Proximity Reader
  - PIN Code or Proximity Reader
  - Proximity Reader Only
- 400 users
- Reader range up to 6 inches (15cm)
- Tamper alarm and lockout
- Programmable door unlock time from 1-99 seconds
- LED indicator and audible tone for ease of operation
- Add, change or delete cards and PINs
- Request-to-Exit input
- Outputs: Lock Relay and Anti-Tamper Relay
- Weather resistant

This product complies with Part 15 Class B of the FCC rules and regulations

950

SPECIFY MODEL		LIST
950C	PIN/Proximity reader with 10 standard prox cards	**310.00**
950K	PIN/Proximity reader with 10 standard key fobs	**350.00**
951	Auxiliary PIN/Proximity reader	**200.00**

CARDS, KEY FOBS & OPTIONS		Add to List
C10	Prox Cards, pack of 10	**35.00**
K10	Key fobs, pack of 10	**65.00**
950GL-KIT	Glass mount reader kit for inside application	**40.00**
TR12	Plug in power supply *(optional)* 120 VAC primary, secondary screw terminals with ground terminal Output 1: Fused unregulated 12VDC @ 780mA Output 2: Regulated 12VDC @ 150mA	**68.00**

C10

K10

SPECIFICATIONS

Keypad:	Sealed Tactile Type 10 Number Keys 2 Function Keys	**Finished Casing:**	ABS Charcoal Grey
		Temperature:	32ºF - 122ºF (0ºC - 50ºC)
		Relative Humidity:	20% - 95%
Reader:	Proximity	**Dimensions:**	5-3/4" L x 3-1/4" W x 1" H 145mm L x 83mm W x 25mm H
Memory:	Non-volatile		
Indicator:	Green LED - Door Open Red LED - Standby	**Weight:**	10 oz. (0.28Kg)
		Proximity Card:	40-bit Wiegand Format
Power Required:	12VDC Regulated Required	**Transmit Frequency:**	125KHz
Current:	Standby - 20mA @ 12VDC Operating - 40mA @ 12VDC		
Output:	Lock Relay 1 Amp @ 24VDC Resistive		

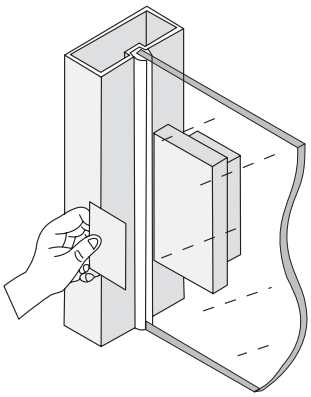

GLASS MOUNTING KIT

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

E72 K - A CIVIC SERIES 32 USER CYLINDRICAL LOCKSET — MMK

The E72K-A Civic is a 32 user battery powered cylindrical digital door lock that incorporates the basic features required to accommodate most stand alone access control applications, including temporary users, at a highly competitive cost. Standard features include an ANSI Grade 1 cylindrical lockset with a lever clutch mechanism, 3-10 digit PIN code, all weather keypad and housing, keypad programmable, 9 management groups, 90 user groups, 8 programmable holidays, manual passage mode, first manager to arrive dual code entry and daylight savings mode.

NEW

G1

E1

G3

E3

E72 K - A CIVIC SERIES		LIST
E72K-A	32 users, 2 3/4" strike, No Audit Trail	**470.00**

SPECIFY LEVER HANDLE		Add to List
Lever Handles with Standard Key Cylinders		**N/C**
G1	Galaxy lever, 6 pin cylinder with Schlage “C” Keyway	
E1	Eclipse lever, 6 pin cylinder with Schlage “C” Keyway	
Lever Handles Less Standard Key Cylinders		**N/C**
G2	Galaxy lever less cylinder. Specify tailpiece kit for competitive brand cylinders, i.e. G2T2	
E2	Eclipse lever less cylinder. Specify tailpiece kit for competitive brand cylinders, i.e. E2T2	
Tailpiece Kits for G2 and E2 Lever Handles		**N/C**
T2	Arrow PK 100C, ILCO 705, Sargent 13-3266, Lorie 1539, ASSA 65673, 65691, Abloy	
T3	Schlage 23-001, Primus, Corbin-Russwin 2000-034	
T9	6 & 7 pin Marks, KSP, Best, Falcon, Medeco, Keymark, Schlage Small Format, 6 pin Sargent	
T9C	6 & 7 pin Corbin	
TMY	6 & 7 pin Yale	
TM	6 pin Schlage large format	
Lever Handles for use with Corbin Russwin Standard Cylinders		**10.00**
G9	Galaxy, Corbin cylinder by others	
E9	Eclipse, Corbin cylinder by others	
Levers for Interchangeable Cores. All l-cores provided by others		**10.00**

G3	Galaxy*	**E3**	Eclipse*

*Accepts 6 & 7 pin Schlage small format, Medeco, Keymark, Best, Falcon, Marks, KSP and 6 pin Sargent.

G12	Galaxy, accepts Corbin 6 pin	**E12**	Eclipse, accepts Corbin 6 pin
G13	Galaxy, accepts Corbin 7 pin	**E13**	Eclipse, accepts Corbin 7 pin
G14	Galaxy, accepts Yale 6 pin	**E14**	Eclipse, accepts Yale 6 pin
G15	Galaxy, accepts Yale 7 pin or Medeco 31-7	**E15**	Eclipse, accepts Yale 7 pin or Medeco 31-7
G19	Galaxy, accepts Schlage 6 pin	**E19**	Eclipse, accepts Schlage 6 pin

SPECIFY FINISH		Add to List
B	Black Powder Coat case with Dull Chrome lever (*standard*)	**N/C**
Q	626 Dull Chrome	**65.00**

SPECIFY OPTIONS		Add to List
BS1	2.375" (60mm) backset	**20.00**
SK-1	Spacer kit for 1.375" door thickness	**65.00**
ST2	4 7/8" strike	**N/C**

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

E72 ENTRYCHECK™ ELECTRONIC CYLINDRICAL LOCKSET UL LISTED MMK

The E72 is a battery powered electronic lockset for 320 to 3000 users. Optional computer management and audit trail capabilities are available for demanding applications. Standard features include an ANSI Grade 1 cylindrical lockset with a lever clutch mechanism, 3 -10 digit pin code, all weather keypad and housing, keypad or computer programming, 9 management groups, 90 user groups, multi-year scheduling, temporary users audit trail capability, multiple zones, real time clock, auto daylight savings adjustment and more. 9/16" latch, 4 7/8" strike standard.

SPECIFY KEYPAD OR PROX ENTRY FOR 320 TO 3000 USERS LIST

Keypad Entry (*iDT & software optional*)

E72K-B	320 users, 1600 even audit trail	**560.00**
E72K-C	500 users, 2200 event audit trail	**620.00**
E72K-D	860 users, 3100 event audit trail	**680.00**
E72K-E	1500 users, 2500 event audit trail	**740.00**
E72K-F	3000 users, 1800 event audit trail	**800.00**

NEW

Prox or Prox and Keypad Entry (*iDT and software required*)

E72P-D	860 users, 3100 event audit trail	**990.00**
E72P-E	1500 users, 2500 event audit trail	**990.00**
E72P-F	3000 users, 1180 event audit trail	**990.00**

Card enroller from SDC or by others required.
HID ProxCard II from SDC or your local security product distributor

E72K

E72P

iDT

E70-PCE

E70-C25

E70-K20

SPECIFY LEVER HANDLE Add to List



Lever Handles with Standard Key Cylinders

G1	Galaxy lever, 6 pin cylinder with Schlage "C" Keyway	**N/C**
E1	Eclipse lever, 6 pin cylinder with Schlage "C" Keyway	**N/C**

Lever Handles Less Standard Key Cylinders

G2	Galaxy lever less cylinder *Specify tailpiece kit for competitive brand cylinders, i.e. G2T2*	**N/C**
E2	Eclipse lever less cylinder *Specify tailpiece kit for competitive brand cylinders, i.e. E2T2*	**N/C**

Tailpiece Kits for G2 and E2 Lever Handles

T2	Arrow PK 100C, ILCO 705, Sargent 13-3266, Lorie 1539, ASSA 65673, 65691, Abloy	**N/C**
T3	Schlage 23-001, Primus, Corbin-Russwin 2000-034	**N/C**
T9	6 & 7 pin Marks, KSP, Best, Falcon, Medeco, Keymark, Schlage Small Format, 6 pin Sargent	**N/C**
T9C	6 & 7 pin Corbin	**N/C**
TMY	6 & 7 pin Yale	**N/C**
TM	6 pin Schlage large format	**N/C**

Lever Handles for use with Corbin Russwin Standard Cylinders

G9	Galaxy, Corbin cylinder by others	**10.00**
E9	Eclipse, Corbin cylinder by others	**10.00**

Levers for Interchangeable Cores. All I-cores provided by others

G1	Galaxy*	**E1**	**Eclipse***	**N/C**

*Accepts 6 & 7 pin Schlage small format, Medeco, Keymark, Best, Falcon, Marks, KSP and 6 pin Sargent

G12	Galaxy, accepts Corbin 6 pin	**E12**	Eclipse, accepts Corbin 6 pin	**N/C**
G13	Galaxy, accepts Corbin 7 pin	**E13**	Eclipse, accepts Corbin 7 pin	**N/C**
G14	Galaxy, accepts Yale 6 pin	**E14**	Eclipse, accepts Yale 6 pin	**N/C**
G15	Galaxy, accepts Yale 7 pin or Medeco 31-7	**E15**	Eclipse, accepts Yale 7 pin or Medeco 31-7	**N/C**
G19	Galaxy, accepts Schlage 6 pin	**E19**	Eclipse, accepts Schlage 6 pin	**N/C**

SPECIFY FINISH Add to List

B	Black Powder Coat (Standard)	**N/C**	**C**	605 Bright brass	**125.00**
Q	626 Dull Chrome	**65.00**	**H**	613 Oil Rubbed Bronze	**125.00**
P	625 Bright Chrome	**125.00**			

OPTIONS & ACCESSORIES Add to List

iDT	Data transmitter, management software	**560.00**
M	Key access & manual lever egress, audit trail capability	**90.00**
AO	Auxiliary relay output (hard wired)	**30.00**
BS1	2.375" backset	**20.00**
SK-1	Spacer kit for 1.375" door	**30.00**
T	2.75" (70mm) "T" strike	**N/C**

CARDS, KEY FOBS & CARD ENROLLER MV Add to List

E70-C25	HID ProxCard® II, 25 cards	**150.00**
E70-K20	HID ProxKey® II, 20 key fobs	**240.00**
E70-PCE	Prox card enroller	**490.00**

ProxCard® and ProxKey® are registered trademarks of HID Corp.

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

E73 ENTRYCHECK™ MORTISE LOCKSET UL LISTED

MMK LIST

The E73 is a battery powered electronic lockset for 320 to 3000 users. Optional computer management and audit trail capabilities are available for demanding applications. Standard features include and ANSI Grade 1 mortise lockset with a lever clutch mechanism, 3 to 10 digit pin code, all weather keypad and housing, keypad or computer programming, 9 management groups, 90 user groups, multi-year scheduling, temporary users, audit trail capability, multiple zones, real time clock, auto daylight savings adjustment and more. 9/16" latch, 4 7/8" strike standard.

Keypad Entry (*iDT & software optional*)

E73K-B	320 users, 1600 even audit trail	**790.00**
E73K-C	500 users, 2200 event audit trail	**850.00**
E73K-D	860 users, 3100 event audit trail	**910.00**
E73K-E	1500 users, 2500 event audit trail	**970.00**
E73K-F	3000 users, 1800 event audit trail	**1030.00**

NEW

Prox or Prox and Keypad Entry (*iDT and software required*)

E73P-D	860 users, 3100 event audit trail	**1220.00**
E73P-E	1500 users, 2500 event audit trail	**1220.00**
E73P-F	3000 users, 1180 event audit trail	**1220.00**

Card enroller from SDC or by others required.
HID ProxCard II from SDC or your local security product distributor

E74 ENTRYCHECK RIM EXIT DEVICE INTERFACE

MMK LIST

The E74 is an electronic rim exit device interface for 320 to 3000 users. Optional computer management and audit trail capability is available for demanding applications. The E74 includes all the access control features found in the E72 and E73 series.

Keypad Entry (*iDT & software optional*)

E74K-B	320 users, 1600 even audit trail	**710.00**
E74K-C	500 users, 2200 event audit trail	**770.00**
E74K-D	860 users, 3100 event audit trail	**830.00**
E74K-E	1500 users, 2500 event audit trail	**970.00**
E74K-F	3000 users, 1800 event audit trail	**950.00**

NEW

Prox or Prox and Keypad Entry (*iDT and software required*)

E74P-D	860 users, 3100 event audit trail	**1140.00**
E74P-E	1500 users, 2500 event audit trail	**1140.00**
E74P-F	3000 users, 1180 event audit trail	**1140.00**

Card enroller from SDC or by others required.
HID ProxCard II from SDC or your local security product distributor

E73K

E74P

SPECIFY LEVER HANDLE

G Galaxy

E Eclipse

SPECIFY FINISH

Add to List

B	Black Powder *(standard)*				**N/C**
Q	626 Dull Chrome	**65.00**	**C**	605 Bright brass	**125.00**
P	625 Bright Chrome	**125.00**	**H**	613 Oil Rubbed Bronze	**125.00**

OPTIONS & ACCESSORIES

Add to List

iDT

iDT	Infrared data transmitter & computer management software	**560.00**
M	Key access and manual lever egress audit trail capability	**90.00**
AO	Auxiliary relay output (hard wired)	**30.00**

E74 ADAPTER PLATE

Add to List

E70-PCE

E70-AP1	Von Duprin 99	**40.00**	**E70-AP6**	Sargent 8800	**40.00**
E70-AP2	Precision 1100	**40.00**	**E70-AP7**	Corbin ED5200	**40.00**
E70-AP3	Precision 21	**40.00**	**E70-AP8**	Dorma 9300	**40.00**
E70-AP4	Precision 2100	**40.00**	**E70-AP9**	Arrow 3800	**40.00**
E70-AP5	Detex Advantex	**40.00**	**E70-AP10**	Yale 7100	**40.00**

CARDS, KEY FOBS & CARD ENROLLER

MV Add to List

E70-C25

E70-C25	HID ProxCard® II, 25 cards	**150.00**	**E70-PCE**	Prox card enroller	**490.00**
E70-K20	HID ProxKey® II, 20 key fobs	**240.00**			

E70-K20

ProxCard® and ProxKey® are registered trademarks of HID Corp.

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

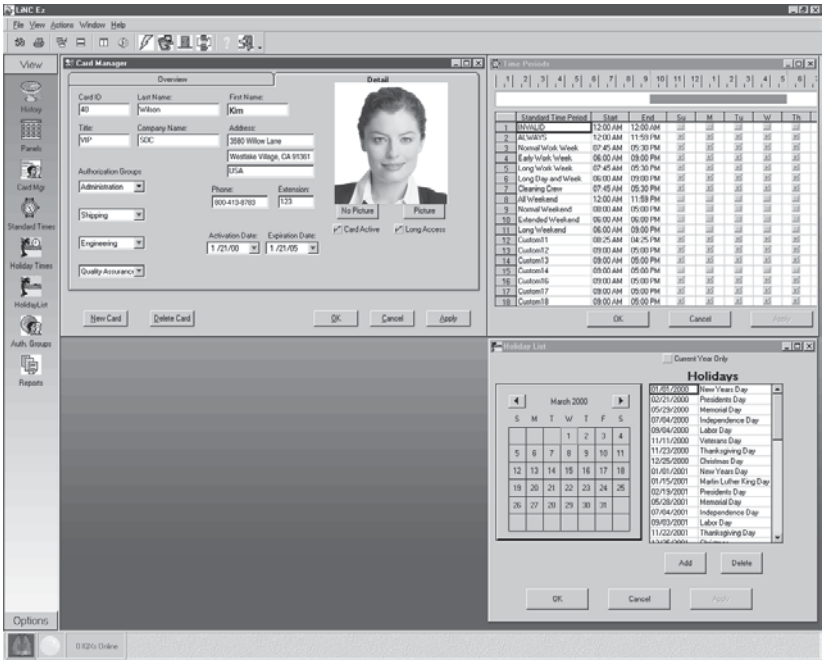

A Simple, Affordable and Complete Access Control System.

The Configuration Wizard Makes Set Up As Easy As 1 - 2 - 3.

The **E3 EntryCheck** Access Control System consists of an easy to understand Windows® based software CD, a 2 door controller in a large hinged cover enclosure, one or two proximity readers and 50 cards. Every thing you need for a complete access control solution.

Controllers with Power Supply Chargers
Master and Expansion controllers may be ordered complete with the power supply/chargers. Built-in SDC power supply (1) is capable of providing power and battery backup for the access control only. Power supplies (2) and (4) provide power and battery backup for both the access control and electric locks for continued operation of the complete system during a power failure.

Power Supply 1 Features

- 12VDC Access Control Output
- 13.5VDC Battery Charger Output

Power Supply 2 & 4 Features

- 12VDC Access Control Output
- Field Selectable 12/24VDC Lock Output
- Field Selectable 13.5/26.5VDC Charging Output
- Emergency Release Input

FEATURES

- Real-Time Windows® based Access Control Systems
- Automatic Program Installation and Set Up with the Configuration Wizard
- Up to 64 Readers, 3000 Cardholders and 50,000 History Transactions
- Handicapped Access Entry
- Automatic Card Activation and Deactivation
- User Friendly Reports
- Electronic Update of Firmware
- "Smart" Supervised Inputs Auto-Calibrating
- ESD Protection on Inputs and Outputs
- Supervised Reader Detection
- Readers, Door Locks, Door Lock Status, Request-To-Exit cables connect to screw terminals
- RS485 Multi-point Communication
- No limitations in cable distance from Host to Controllers

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

®Windows is a Registered Trademark of Microsoft Corporation

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

SPECIFY MASTER CONTROLLER

	MMMK	LIST

CONTROLLER
- Enclosure: 11-1/4" x 11-1/4" x 3" (28.6 cm x 28.6 cm x 7.6 cm)
- Accommodates two 12V 4Ah batteries

Master Controller Components: 1 or 2 readers, controller and enclosure, Software, RS485, 50 Cards

MODEL	DESCRIPTION	
E3-M1N	1 Reader	**1790.00**
E3-M2N	2 Readers	**1936.00**
E3-M1N1	1 Reader & Power Supply/Charger #1 for access control	**2066.00**
E3-M2N1	2 Readers & Power Supply/Charger #1 for access control	**2212.00**
E3-M1N2	1 Reader & Power Supply/Charger #2 for access control & locks Max lock capacity 0.8 Amp @ 12/24VDC	**2182.00**
E3-M2N2	2 Readers & Power Supply/Charger #2 for access control & locks Max lock capacity 0.8 Amp @ 12/24VDC	**2326.00**
E3-M1N4	1 Reader & Power Supply/Charger #4 for access control & locks Max lock capacity 3.3 Amps @ 12/24VDC	**2478.00**
E3-M2N4	2 Readers & Power Supply/Charger #4 for access control & locks Max lock capacity 3.3 Amps @ 12/24VDC	**2624.00**

SPECIFY EXPANSION CONTROLLER

	LIST

CONTROLLER WITH POWER SUPPLY 1 OR 2
• All other features same as above

Expansion Controller Components: 1 or 2 readers, controller and enclosure

MODEL	DESCRIPTION	
E3-E1N	1 Reader	**1472.00**
E3-E2N	2 Readers	**1616.00**
E3-E1N1	1 Reader & Power Supply/Charger #1 for access control	**1798.00**
E3-E2N1	2 Readers & Power Supply/Charger #1 for access control	**1892.00**
E3-E1N2	1 Reader & Power Supply/Charger #2 for access control & locks Max lock capacity 0.8 Amp @ 12/24VDC	**1862.00**
E3-E2N2	2 Readers & Power Supply/Charger #2 for access control & locks Max lock capacity 0.8 Amp @ 12/24VDC	**2008.00**
E3-E1N4	1 Reader & Power Supply/Charger #4 for access control & locks Max lock capacity 3.3 Amps @ 12/24VDC	**2158.00**
E3-E2N4	2 Readers & Power Supply/Charger #4 for access control & locks Max lock capacity 3.3 Amps @ 12/24VDC	**2304.00**

CONTROLLER WITH POWER SUPPLY 4
- Housed in large hinged cover cabinet 14" h x 16" w x 6" d (35.5cm h x 40.7cm h x 15.2cm d)
- Up to six 12V 7 Ah Batteries
- All other features same as above

OPTIONS & ACCESSORIES

	Add to List

MODEL	DESCRIPTION	
E-C50	Proximity cards, pack of 50 (vertical slot punch)	**240.00**
E-K50	Key fobs, pack of 50	**400.00**
PR-N	Proximity reader, narrow (4-5" read range)	**190.00**
RB12V4	12V, 4Ah battery (for 11"x11" enclosure)	**34.00**
RB12V7	12V, 7Ah battery (for 14"x16" enclosure)	**48.00**

PR-N READER

E-C50 CARD

E-K50 FOB



RS485

PTH SERIES POWER TRANSFER HINGE (UL LISTED) LSK LIST

UL LISTED
10B Listed For
3 Hrs Fire Rated Doors

Power Transfer Hinge Application
Installed in the center hinge position of the door, PTH Power Transfer Hinges provide the concealed wires required to transfer power from the frame to electric hardware in the door for control and monitoring capability.

Features
- 5' Ft Cable
- UL10B Listed for 3 Hour Fire Rated Doors.
- 800,000 cycles. 8 times UL test criteria
- Wire Replacement Warranty

NEW

PTH x 5 Ft Cable

PTH x 5 Ft Cable
And Door Position Switch

PTH-4Q	Four (4) Conductor Power Transfer Hinge 28 gauge - 1-pair 1 Amp, 1-pair 250 mA 4.5" x 4.5" standard weight, 626 Dull Chrome	**150.00**
PTH-4Q-DPS	Four (4) Conductor Power Transfer Hinge with Door Status Contact 28 gauge - 1-pair 1 Amp, 1-pair 250 mA @ 12/24V AC/DC Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	**186.00**
PTH-10Q	Ten (10) Conductor Power Transfer Hinge 30 gauge - 1-pair 1 Amp, 4-pair 250 mA 4.5" x 4.5" standard weight, 626 Dull Chrome	**195.00**
PTH-10Q-DPS	Ten (10) Conductor Power Transfer Hinge with Door Status Contact 30 gauge - 1-pair 1 Amp, 4-pair 250 mA Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	**226.00**

SPECIFY FINISH — Add to List

Dull Chrome finish is standard as specified by suffix Q.
To specify special finish, designate finish suffix below in lieu of Q.

C	605 Bright brass	**N/C**
H	613 Oil rubbed bronze	**N/C**
P	625 Bright Chrome	**N/C**

OPTIONS

Consult factory for 3 knuckle, and special size, and heavy weight requirements

DOOR CORE DRILL KIT — NET

NEW

The SDC door core drill fixture provides the best method of wire preparation for fire rated or non fire rated particle filled or solid wood doors to accommodate the installation of electrified locksets, exit devices and hinges while maintaining door integrity and rating

- Tested by ITS/ Warnock Hersey for field drilling of rated doors
- Installer may call for inspection of doors to be re-certified after drilling
- Allows for drilling from the hinge side without removing the door from the frame
- Will drill at 20 degrees from center, up or down, from the hinge to the lock prep on a 3'0" door
- Drills doors in 3 minutes
- Easy to use, no experience required
- Includes special 58 inch evacuator drill bit with custom tool room sharpened end
- High speed Delrin bushings ensure long tool life at high speed drilling with little or no noise. Your commercial customers will love the quiet operation in their offices

Discount Not Applicable

7000-DF	Door Core Drill Fixture	**650.00 NET**
7000-DB	3/8" Custom Replacement Drill bit	**124.00 NET**

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

Function: 7200 series locksets are locked on the outside and unlocked from the exterior by an access control or mechanical key. The inside lever is always operable for uninhibited egress.

***Request-to-Exit Output**: Standard with all SDC brand Z7200 locksets. SPDT, 3 Amps @ 30VDC*

NEW

Z7250G

Features
- Clutch for vandal resistance
- Choice of failsecure or failsafe mode
- Dual 12/24 VDC
- REX output: Z7200 standard; S and ZS7200 optional
- 'C' type keyway
- Independent lever power return springs

Specifications
- Dual Voltage, 600/300 mA @ 12/24VDC
- Exceeds ANSI A156-2-4000 Grade 1
- 0.5625" latchbolt
- 2.75" Backset
- 4.875 strike ANSI A115.2

SPECIFY MODEL — LIST

Locks supplied by SDC		LIST
Z7250	SDC Failsafe, with REX Output	**396.00**
Z7252	SDC Failsecure, with REX Output	**396.00**
ZS7250	Schlage, Failsafe	**460.00**
ZS7252	Schlage, Failsecure	**460.00**

Lockset provided by customer for electrification		
S7250	Schlage, Failsafe	**110.00**
S7252	Schlage, Failsecure	**110.00**

Z7250E

SPECIFY LEVER TRIM

SDC Lever Trim		Schlage Lever Trim		
G	Galaxy	**RHO**	Rhodes	**N/C**
E	Eclipse	**SPA**	Sparta	**N/C**

NEW

S7250ROH
ZS7250ROH

SPECIFY FINISH

C	605 Bright Brass	**H**	613 Oil Rubbed Bronze	**N/C**
D	606 Dull Brass	**P**	625 Bright Chrome	**N/C**
F	611 Bright Bronze	**Q**	626 Dull Chrome	**N/C**
G	612 Dull Bronze			**N/C**

S7250SPA
ZS7250SPA

OPTIONAL CYLINDER and I-CORES — Add to List

Optional Cylinder

6 PIN Keyed different is standard

6PKA	6 PIN Keyed alike	**N/C**

Interchangeable Core (SDC Brand Locks Only)

IC6P-KA	6 pin I-Core, small format, keyed alike	**50.00**
IC6P-KD	6 pin I-Core, small format, keyed different	**50.00**
IC7P-KD	7 pin I-Core, small format, keyed different	**50.00**
IC7P-KA	7 pin I-Core, small format, keyed alike	**50.00**

I-CORE

OPTIONAL STRIKE PLATES — Add to List

4.875" ANSI strike is standard unless specified otherwise

S2	2.25" ANSI strike with square corners	**20.00**
S3	2.25" Full lip strike with square corners (for wood frames)	**20.00**

OPTIONAL LATCH AND BACKSET ASSEMBLIES — Add to List

L75	0.75" Latchbolt assembly (required for **pairs** of 3 Hr, A label, Fire Rated Doors)	**16.00**
B2	2.375" backset latch assembly with 0.5625" Latch	**20.00**

OPTIONS & ACCESSORIES — Add to List

REX	For S7200 and ZS7200, request-to-exit output, SPDT, 3 Amps @ 30VDC	**76.00**
030736-00-70	Drill guide for locating 5/16" thru-bolt holes	**25.00**

UL LISTED
Electrically Controlled Single Point Locks & Latches, 3 Hr A Label Fire Doors

3773-0324:104
CSFM

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

SELECTRIC™ PRO Z7800 ELECTRIC LOCKSET c UL us LISTED — LSK

SELECTRIC® PRO locksets incorporate an SDC manufactured Grade 1 Heavy Duty mortise lockset and vandal resistant clutch mechanism. Proprietary to SDC, SELECTRIC® PRO locksets, all operational attributes are field selectable. In addition, SELECTRIC® PRO locksets retrofit many other mechanical lock brands making them fully compatible with new and retrofit applications.

NPS SIA NEW PRODUCT SHOWCASE

Field Selectable Attributes
- Selectable mode, failsafe or failsecure
- Selectable function, locked outside only or both sides
- Selectable voltage, 12 or 24VDC
- Selectable handing

CSFM 3773-0324:104

MEA City of New York 768-80-SA

c UL us LISTED Electrically Controlled Single Point Locks or Latches 3 Hr A Label Fire Rated Doors

NEW

SPECIFY FUNCTION AND MODE — LIST

SDC Supplied Electrified Locksets with lever trim
SDC Brand 7800 lockset. Clutch for lever trim vandal resistance, SDC lever trim

Z7830	Locked both sides, failsafe. Field reversible to failsecure mode.	**620.00**
Z7850	Locked outside only, failsafe. Field reversible to failsecure mode.	**620.00**
Z7832	Locked both sides, failsecure. Field reversible to failsafe mode.	**620.00**
Z7852	Locked outside only, failsecure. Field reversible to failsafe mode.	**620.00**

SPECIFY HAND

L	Left hand	**LR**	Left hand reversed	**N/C**
R	Right hand	**RR**	Right hand reversed	**N/C**

SPECIFY FINISH

U	630 Dull Stainless Steel *(standard)*	**F**	611 Bright Bronze	**P**	625 Bright Chrome **N/C**
C	605 Bright Brass	**G**	612 Dull Bronze	**Q**	626 Dull Chrome **N/C**
D	606 Dull Brass	**H**	613 Oil Rubbed Bronze	**S**	629 Bright Stainless Steel **N/C**

SPECIFY LEVER TRIM

G *GE*

E *EE*

N *NE*

G	Galaxy with rose	**N/C**	**GE**	Galaxy with escutcheon	**55.00**
E	Eclipse with rose	**N/C**	**EE**	Eclipse with escutcheon	**55.00**
N	Nova with rose	**N/C**	**NE**	Nova with escutcheon	**55.00**

OPTIONS AND ACCESSORIES — Add to List

Optional Outputs

R	Request-to-exit. Indicates inside lever operation for access control request-to-exit input, alarm shunt, remote annunciation or CCTV activation, SPDT 5 Amp @ 30VDC	**76.00**
D	Door position status output. Indicates door open and door closed. SPDT 5 Amp @ 30VDC.	**80.00**
S	Latched & locked status output. Indicates door latched and locked and door unlocked. SPDT 5 Amp @ 30VDC	**100.00**

Optional Cable and Connectors

CC1-5	5ft. Cable and connectors for locks without optional outputs	**30.00**
CC3-5	5ft. Cable and connectors for locks with optional outputs	**50.00**
Optional Key Cylinders	1 required for 7850/7852 2 required for 7830/7832	**30.00**
CYL-6KDQ	6 pin, 1.125" keyed different, 626 Dull Chrome	**30.00**
CYL-6KAQ	6 pin, 1.125" keyed alike, 626 Dull Chrome	**30.00**

NEW

PTH
UL 10B Listed for 3Hr Fire Rated Doors
See page 14

Power Transfer Hinge
UL listed, 4.5", five knuckle hinge. Consult factory for 4" or 5" heavy weight requirements. Special finish available

PTH-4Q	Four wire, dull chrome	**150.00**
PTH-10Q	Ten wire, dull chrome	**195.00**

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

SELECTRIC™ CONVERSIONS 7800 SERIES LOCKSETS

c UL us LISTED

LSK

Send the brand lockset of your choice to SDC for electrification. When factory authorized, distributors may take advantage of SDC's mechanical lock inventory to expedite orders. SDC stocks Schlage, Corbin Russwin, Yale, Best and Sargent mechanical locks that may be electrified and charged to an order. Meanwhile, distributors may then send replacement mechanical locks to SDC for credit and SDC inventory replenishment.

Field Selectable Attributes
- Selectable mode, failsafe-failsecure
- Selectable voltage, 12/24VDC
- Selectable function and handing based on brand capability

MEA
City of New York
768-80-SA

3773-0324:104

NEW

c UL us LISTED Electrically Controlled Single Point Locks or Latches
3 Hr A Label Fire Rated Doors

NPS NEW PRODUCT SHOWCASE

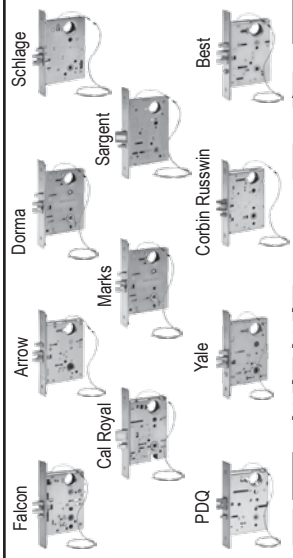

SPECIFY BRAND MODEL — LIST

New mechanical lock chassis provided by customer for factory electrification

A	Falcon - LM561	**P**	Yale - 8805	**V**	Marks - 5J	**150.00**
D	Sargent - 8201	**S**	Schlage - L9080	**W**	Cal Royal - M8080	**150.00**
I	Corbin/Russwin - ML2055	**T**	Best - 35HEW	**X**	PDQ - MR148	**150.00**
N	Arrow - B12	**U**	Dorma - ML9050			**150.00**

Note: Two locking hubs required for 7830 & 7832

Electrified lock chasis, less trim, provided by SDC factory

ZS	Schlage	**310.00**		**ZN**	Arrow	**430.00**
ZA	Falcon	**380.00**		**ZP**	Yale	**380.00**
ZD	Sargent	**500.00**		**ZT**	Best	**400.00**
ZI	Corbin Russwin	**380.00**				

NOTE: All locks supplied less cylinder

SPECIFY FUNCTION & ELECTRICAL MODE — Add to List

7830	Locked both sides, failsafe. Field reversible to failsecure.	**20.00**
7850	Locked outside only, failsafe. Field reversible to failsecure.	**N/C**
7832	Locked both sides, failsecure. Field reversible to failsafe.	**20.00**
7852	Locked outside only, failsecure. Field reversible to failsafe.	**N/C**

SPECIFY HAND

L	Left hand	**LR**	Left hand reversed	**N/C**
R	Right hand	**RR**	Right hand reversed	**N/C**

SPECIFY FINISH

U	630 Dull Stainless Steel *(standard)*	**F**	611 Bright Bronze	**P**	625 Bright Chrome	**N/C**
C	605 Bright Brass	**G**	612 Dull Bronze	**Q**	626 Dull Chrome	**N/C**
D	606 Dull Brass	**H**	613 Oil Rubbed Bronze	**S**	629 Bright Stainless Steel	**N/C**

NEW

PTH
UL 10B Listed for 3Hr
Fire Rated Doors
See page 14

OPTIONS AND ACCESSORIES — Add to List

Optional Outputs

R	Request-To-Exit Indicates inside lever operation for access control request-to-exit input, alarm shunt, remote annunciation or CCTV activation, SPDT 5 Amp @ 30VDC Available with locks A, D, I, N, P, S, T, U, S, V and ZS only.	**76.00**
D	Door Position Status Output Indicates door open and door closed. SPDT 5 Amp @ 30VDC Available with locks Z and S only.	**80.00**
S	Latched & Locked Status Output Indicates door latched and locked and door unlocked. SPDT 5 Amp @ 30VDC Available with locks Z and S only.	**100.00**
L	Latchbolt status. Indicates door latched and unlatched status. SPDT 5 Amp @ 30VDC Available with locks A, D, I, N, P, S, T, U, V and ZS only.	**76.00**

Consult factory for recent updates of option availability with any model

Optional Cable and Connectors

CC1-5	5ft. Cable and connectors for locks without optional outputs	**30.00**
CC3-5	5ft. Cable and connectors for locks with optional outputs	**50.00**

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

HiTower – Electric Frame Actuator Controlled Locksets

The HiTower utilizes SDC's original concept of utilizing an electric frame actuator to control a mechanical lock in the door, eliminating the cost and labor associated with a power transfer hinge and wires through the door.

MEA
City of New York
768-80-SA

CSFM
3773-0324:101

c UL us LISTED Electrically Controlled Single Point Locks or Latches
3 Hr A Label Fire Rated Doors

HiTower Z7500

- SDC brand Grade 1 Heavy Duty lockset
- Field selectable function, Locked outside only or both sides

HiTower Conversions

Distributors provide a new mechanical lock brand of choice to the factory for conversion to an electric frame actuator controlled lockset.



Z7500

O7550
Yale Conversion

SPECIFY SOURCE OF MORTISE LOCK — LIST

HiTower® Pro - Mortise Locks with trim provided by SDC

Z	SDC lockset	**ZR**	SDC Retrofit lockset (replaces 5000/6000 series)

HiTower® Conversion - New Mechanical Locks provided by your distributor for electric control

A	Falcon*	LM-581	**O**	Yale	7130F Exit device
D	Sargent	8204	**P**	Yale	8805
I	Corbin/Russwin	2057	**R**	Schlage Retro	L9080 (replaces 5000 series)
N	Arrow	B12	**S**	Schlage	L9080
			T	Best	35 HEW and 45H

*All Falcon locks must be supplied with 0201000-000 face plate, less hub locking bar

SPECIFY FUNCTION

7530	Locked both sides Unlocked by access control, remote control and key from either side, failsafe
7550	Locked outside only Unlocked by access control, remote control, outside key and inside lever, failsafe
7560	Locked both sides Unlocked by access control, remote control and key from either side, failsecure
7570	Locked outside only Unlocked by access control, remote control, outside key and inside lever, failsecure

SPECIFY HAND

L	Left hand	**LR**	Left hand reversed
R	Right hand	**RR**	Right hand reversed

G
Galaxy

GE

E
Eclipse

EE

N
Nova

NE

ACTUATOR VOLTAGE AND FRAME SIZE

Failsafe actuator for 1-3/4" to 2" face frames		Extra Narrow failsafe actuator for 1-1/4" to 1-1/2" face frames		+Failsecure actuator for 2" face frames	
A	115VAC 0.2 Amps	**D**	115VAC 0.2 Amps	**G**	115VAC 0.2 Amps
B	24VAC 0.5 Amps	**E**	24VAC 0.5 Amps	**H**	24VAC 0.5 Amps
C	24VDC 0.5 Amps	**F**	24VDC 0.5 Amps	**J**	24VDC 0.5 Amps

+ Fail Secure Actuator Available with Z or S lockset only. Special strike preparation required

SPECIFY FINISH

U	630 Dull Stainless Steel *(standard)*	**F**	611 Bright Bronze	**P**	625 Bright Chrome
C	605 Bright Brass	**G**	612 Dull Bronze	**Q**	626 Dull Chrome
D	606 Dull Brass	**H**	613 Oil Rubbed Bronze	**S**	629 Bright Stainless Steel

SPECIFY LEVER TRIM FOR Z & ZR

G	Galaxy with rose	**GE**	Galaxy with escutcheon
E	Eclipse with rose	**EE**	Eclipse with escutcheon
N	Nova with rose	**NE**	Nova with escutcheon

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

HiTower® MORTISE LOCK SOURCES Z AND ZR

SDC mortise lock, trim and actuator supplied by SDC

SOURCE/FUNCTION		
Z7530	Failsafe, locked both sides with rose trim	**665.00**
Z7550	Failsafe, locked outside only with rose trim	**655.00**
Z7560	Failsecure, locked Both sides with rose trim	**805.00**
Z7570	Failsecure, locked outside only with rose trim	**795.00**
ZR7530	*(Replaces 5000 series)* Failsafe, locked both sides with rose trim	**765.00**
ZR7550	*(Replaces 5000 series)* Failsafe, locked outside only with rose trim	**755.00**
ZR7560	*(Replaces 6000 series)* Failsecure, locked both sides with rose trim	**800.00**
ZR7570	*(Replaces 6000 series)* Failsecure, locked outside only with rose trim	**790.00**
Extra Narrow Failsafe Frame Actuator		**Add 120.00**
(Actuator type D, E, F, Z only page 18) For 1-1/4" to 1-1/2" frames. Special strike prep required. Not available with ZR or failsecure 7560 and 7570		
Escutcheon Trim GE, EE, NE		**Add 55.00**

HiTower® CONVERSIONS MORTISE LOCK SOURCES A - Q AND S - V

Mortise lock supplied by distributor for modification and actuator supplied by SDC

SOURCE/FUNCTION		
A - Q and S - V 7530	Failsafe, locked both sides	**430.00**
A - Q and S - V 7550	Failsafe, locked outside only	**420.00**
S7560	Failsecure, locked both sides	**570.00**
S7570	Failsecure, locked outside only	**560.00**
Extra Narrow Failsafe Frame Actuator		**120.00**
(Actuator type D, E, F, Z only page 18) For 1-1/4" to 1-1/2" frames. Special strike prep required. Not available with R or failsecure 7560 and 7570		

HiTower® MORTISE LOCK SOURCE R

Schlage Mortise lock supplied by distributor for modification and actuator supplied by SDC

SOURCE/FUNCTION		
R7530	*(Replaces 5000 series)* Failsafe, locked both sides	**506.00**
R7550	*(Replaces 5000 series)* Failsafe, locked outside only	**496.00**
R7560	*(Replaces 6000 series)* Failsecure, locked both sides	**560.00**
R7570	*(Replaces 6000 series)* Failsecure, locked outside only	**550.00**

OPTIONS AND ACCESSORIES — Add to List

Lock status and wire harness

L	Latch status switch, SPDT, 5 Amps @ 30VDC	**60.00**
S	Latch and deadlock status, 3 Amps @ 30VDC	**100.00**
SC-10	Socket connectors with 10 ft. cable	**60.00**

Special Strikes

WSP	1-1/4" x 9-1/2" wood strike	**50.00**
SSP	Special retrofit strike plate	**POA**

Specify extended lip strike in writing for the following

Std. 1-3/4" actuator with 1-3/8" - 1-1/2" extended lip	**30.00**
Std. 1-3/4" actuator with 1-3/4" - 2" extended lip	**30.00**
Narrow 1-1/4" actuator with 1-3/8" - 1-1/2" extended lip	**30.00**
Narrow 1-1/4" actuator with 1-3/4" - 2" extended lip	**30.00**

Electrical back boxes for frame actuators with conduit knockouts:
(Recommended for new construction)

7500EB-S	For standard actuator in 1-3/4" or 2" face frame	**30.00**
7500EB-N	For narrow actuator in 1-1/4" or 1-1/2" face frame	**30.00**

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

CONVENTIONAL MORTISE BOLT LOCKS — AK — LIST

110
210

160
260

110/160 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
210/260 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
Mortise strike standard

5" depth required

110	2-3/4" x 1-1/4" Face plate, less auto re-lock switch, failsafe **V** 628 Aluminum *(standard)*	**172.00**
210	2-3/4" x 1-1/4" Face plate, less auto re-lock switch, failsecure **V** 628 Aluminum *(standard)*	**172.00**
160	4-7/8" x 1-1/4" Face plate with auto re-lock switch, failsafe **Q** 626 Dull Chrome *(standard)*	**230.00**
260	4-7/8" x 1-1/4" Face plate with auto re-lock switch, failsecure **Q** 626 Dull Chrome *(standard)*	**230.00**
100EB	Wood frame back box for 160/260 series *(not available for 110/210)*	**24.00**

SPECIFY VOLTAGE

Example: 110IV			Example: 210HV		
110/160			**210/260**		
I	12/24VDC	**N/C**	**H**	12/24VDC	**N/C**

See finish on page 21

SPACESAVER® MORTISE BOLT LOCKS FIT 1-3/4" FRAMES — AK — LIST

3773-0324:001

FS23M

1490A
2490A

1091A
1091ADL
1291A

Dimensions: 8"L x 1-1/2"W x 1-5/8"D
FS/1090/1490 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
1290/2490 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
Finish: **V** 628 Aluminum *(standard)* **See special finish on page 21**

c UL US LISTED Auxiliary Locks

UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"

FS23M	Dual failsafe	**342.00**
1091	Less auto re-lock, failsafe	**284.00**
1091A	Failsafe	**324.00**
1091ADL	Dead locking, failsafe	**364.00**
1291A	Failsecure	**370.00**
1490A	Fits 1-1/2" frame *(non UL), failsafe*	**360.00**
2490A	Failsecure. Fits 1-1/2" frame (non *UL*), failsecure	**468.00**
1000EB	Back box for FS23M-1090A	**36.00**
WD	Suffix for wood face plates	**36.00**

SPECIFY VOLTAGE

Example: 109AIV			Example: 1291AHV		
1091A-1091ADL/1490A/FS23M			**1291A/2490A**		
I	12/24VDC	**N/C**	**H**	12/24VDC	**N/C**

HEAVY DUTY SPACESAVER® MORTISE BOLT LOCKS — AK — LIST

1190A ***2090A***

1190A failsafe, 0.7Amp @ 24VDC
2090A failsecure, 4 Amp In rush, 0.5 Amp seated @ 24VDC,
3090 - 0.7 Amp locking coil, 1.4 Amp release coil, 3/4" bolt, 3/4" throw, 24VDC

UL US LISTED

1190A	Failsafe	**360.00**	**2090A**	Failsecure	**424.00**
1190MRA *	Failsafe	**560.00**	**3090A**	Failsecure	**520.00**
			2090MRA *	Failsecure	**600.00**
	* Indicates Handing Required		**3090MRA** *	Failsecure	**640.00**

PANICLOK EXIT DEVICE RELEASE — AK — LIST

PBD2090A

Finish: V 628 Aluminum std. 24VDC, 4.0 A inrush, 0.5A seated

PBD2090A	Dor-O-Matic/Kawneer *(handing required)*	**580.00**

UL US LISTED

*See special finishes & options page 21

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

CABINET LOCK

AK LIST

290

- For drawers or cabinets and display cases with swinging or sliding doors
- Failsecure (field reversible for failsafe)
- Dual Voltage: 12/24VDC @ 250mA/130mA
- Dimensions: 3.25” L x 1.125” W x 1.125” D
- Finish: Black

290	Micro cabinet lock	**96.00**
290LS	Micro cabinet lock with locked status switch	**120.00**

UNIVERSAL SURFACE MOUNT LOCKS

AK LIST

180/280

Dimensions: 6” L x 2” W x 2” H
180 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
280 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
Standard finish: 628 Aluminum

“B”
Standard

180F	Surface mount, less ARS, F strike, failsafe	**194.00**
180B	Surface mount, less ARS, B strike, failsafe	**214.00**
180AB	Surface mount, ARS, B strike, failsafe	**246.00**
280F	Surface mount, less ARS, F strike, failsecure	**194.00**
280B	Surface mount, less ARS, B strike, failsecure	**241.00**

“F”

SPECIFY FINISH

Add to List

V	628 Anodized Aluminum *(standard)*	**N/C**

Mortise Bolt Locks

X	313 Dark Bronze	**30.00**
Y	335 Black	**36.00**

Single Surface Mounted Bolt Locks

X	313 Dark Bronze	**40.00**
Y	335 Black	**48.00**

Plated Architectural Finishes - Mortise Bolt Locks Only

C	605 Bright Brass	**78.00**			
D	606 Dull Brass	**78.00**	**P**	625 Bright Chrome	**78.00**
F	611 Bright Bronze	**78.00**	**Q**	626 Dull Chrome	**78.00**
G	612 Satin bronze	**78.00**	**U**	630 Stainless steel	**78.00**
H	613 Oil rubbed bronze	**78.00**			

OPTIONS

CK Add to List

6	Magnetic bolt position sensor, SPDT	**48.00**
DPS	Mechanical door position sensor, SPDT *(not available with 180/280)*	**40.00**
9	Magnetic door position sensor, SPDT *(not available with 180F/280F)*	**48.00**
BR64AL	Rectifier for AC Operation	**20.00**

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

GATE LOCKS

AK LIST

GL163A
GL263A

Designed for outdoor installation on swinging or sliding gates. Specify swinging or sliding gate

Specify 12/24VDC or 24VAC			Specify 12/24 VDC or 24 VAC		
GL160A	Failsafe	**800.00**	**GL260A**	Failsecure	**800.00**
GL163A	Keyswitch, failsafe	**860.00**	**GL263A**	Keyswitch, failsecure	**860.00**
			GL260MRA	Mechanical key unlock, failsecure	**900.00**

OPTIONS

Add to List

DPS-GL	Gate position sensor SPDT for gate lock (GL series)	**80.00**
BPS-GL	Bolt position sensor, SPDT for gate lock	**80.00**
AC	24VAC Voltage	**18.00**

REPLACEMENT SOLENOIDS

c UL us LISTED

AK Add to List

For surface and mortise mounted bolt locks

1090, 1490 and FS23 Bolt Locks

Part No.	Voltage	
100-1	115VAC @ 0.2 Amp, Failsafe (SDC 7500 HiTower® only)	**118.00**
100-2	24VAC @ 0.5 Amp, Failsafe	**118.00**
100-3	24VDC @ 0.5 Amp, Failsafe	**100.00**
100-4	Dual Coil 12VDC @ 0.9 Amp, 24VDC @ 0.45A, Failsafe	**100.00**

1190 Bolt Locks

Part No.	Voltage	
1244	24VDC @ 0.7 Amp, Failsafe	**140.00**

1290 and 2490 Bolt Locks

Part No.	Voltage	
200-2	24VAC @ 0.5 Amp, Failsecure	**118.00**
200-3	24VDC @ 0.5 Amp, Failsecure	**100.00**
200-5	12VDC @ 1 Amp, Failsecure	**100.00**
200-4	Dual Coil, 12 VDC @ 0.9 A 24VDC @ 0.45A	**100.00**

2090 Bolt Lock

Part No.	Voltage	
1251D	24VDC less switch, Failsecure (4Amp In-Rush 0.5 Amp Holding)	**180.00**
1251DS	24VDC with coil transfer switch, *Failsecure*	**192.00**

3090 Bolt Lock

Part No.	Voltage	
1216-3S	24VDC @ 1.4 Amp unlocking coil, Failsecure	**70.00**
1244	24VDC @ 0.7 Amp locking coil, Failsecure	**140.00**

HiTower® 7560, 7570 Actuator Controlled Locksets

Part No.	Voltage	
250-1	115VAC @ 0.2A, Failsecure	**198.00**
250-2	24VAC @ 0.5A, Failsecure	**198.00**
250-3	24VDC @0.5A, Failsecure	**180.00**

SELECTRIC™ 7800 Electrified Lockset

Part No.	Voltage	
7800-4	12/24 VDC @ 600/300 mA Reversible Failsafe-Failsecure	**90.00**

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

EMLock®

Lifetime Warranty

c UL us LISTED

GWXT Auxiliary Locks CVXJ Burglary Resistant Electrically Operated Door Lock

UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"

Uniform Design and Installation of all Models

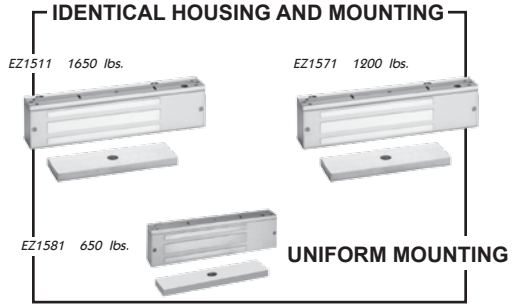

Distributor and Installer Flexibility

Field Install:
- Monitoring Outputs
- Timers
- Top Jamb Kits
- Glass Door Kits



The modular design permits the addition of optional features, enabling standard locks to conform to any applications.

Lifetime Serviceability and Upgradeability

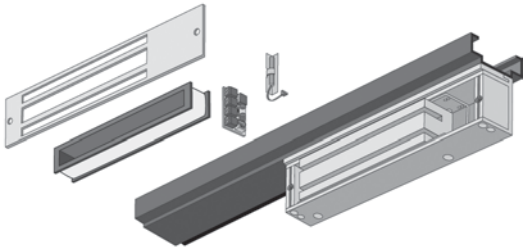

Field Upgrades and service without removing the lock from the frame eliminates lock replacement lead time and labor

Interlocking EZ Mount Assembly

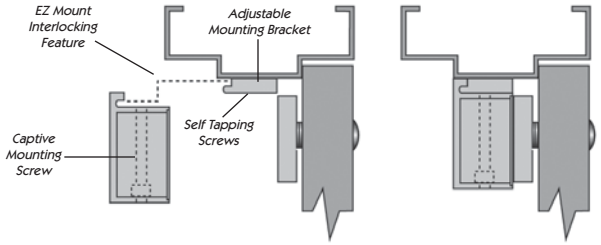

View the animated presentation and see how easy SDC EmLock installation is at www.sdcsecurity.com

1510 Series Grade 1
1650 lb / 748 Kg Holding Force

Electrical Specifications

Voltage: 12/24VDC Voltage Sensing Input
Single: 350mA @ 24VDC; 670mA @ 12VDC
Double: 700mA @ 24VDC; 1.34A @12VDC

Mechanical Specifications

Single: 11" L x 2.75" H x 1.562" D (279.4 x 69.9 x 39.7 mm)

Double: 22" L x 2.75" H x 1.562" D (558.8 x 69.9 x 39.7 mm)

Common Configurations (Alum. Finish)

1511V	**Single EmLock**	**396.00**
1511V-DPS	Door Sensor	**446.00**
1511V-BA	Bond Sensor	**496.00**
1511V-T	Relock Timer	**460.00**
1511V-BADPS	Door/Bond Sensor	**546.00**
1511V-TJ1V	Top Jamb kit	**494.00**
1511V-HDB1V	Glass Door kit	**576.00**
1512V	**Double EmLock**	**792.00**
1512V-2DPS	2 Door Sensor	**892.00**
1512V-2BA	2 Bond Sensor	**992.00**
1512V-T	Timer	**856.00**
1512V-TJ2V	Top Jamb kit	**988.00**
1512V-HDB2V	Glass Door kit	**1,152.00**

1570 Series Grade 1
1200 lb / 544 Kg Holding Force

Electrical Specifications

3 Watts Power Saver

Voltage: 12/24VDC Voltage Sensing Input
Single: 125mA @ 24VDC; 250mA @ 12VDC
Double: 250mA @ 24VDC; 500mA @ 12VDC

Mechanical Specifications

Single: 11" L x 2.75" H x 1.562" D (279.4 x 69.9 x 39.7 mm)

Double: 22" L x 2.75" H x 1.562" D (558.8 x 69.9 x 39.7 mm)

Common Configurations (Alum. Finish)

1571V	**Single EmLock**	**352.00**
1571V-DPS	Door Sensor	**402.00**
1571V-BA	Bond Sensor	**452.00**
1571V-T	Relock Timer	**416.00**
1571V-BADPS	Door/Bond Sensor	**502.00**
1571V-TJ1V	Top Jamb kit	**450.00**
1571V-HDB1V	Glass Door kit	**532.00**
1572V	**Double EmLock**	**704.00**
1572V-2DPS	2 Door Sensor	**804.00**
1572V-2BA	2 Bond Sensor	**904.00**
1572V-T	Timer	**768.00**
1572V-TJ2V	Top Jamb kit	**902.00**
1572V-HDB2V	Glass Door kit	**1,064.00**

1580 Series Grade 1
650 lb / 295 Kg Holding Force

Electrical Specifications

Voltage: 12/24VDC Voltage Sensing Input
Single: 220mA @ 24VDC; 440mA @ 12VDC
Double: 440mA @ 24VDC; 880mA @ 12VDC

Mechanical Specifications

Single: 8.75" L x 2.125" H x 1.25" D (222.2 x 54 x 31.8 mm)

Double: 17.5" L x 2.125" H x 1.25" D (444.5 x 54 x 31.8 mm)

Common Configurations (Alum. Finish)

1581V	**Single EmLock**	**292.00**
1581V-DPS	Door Sensor	**342.00**
1581V-BA	Bond Sensor	**392.00**
1581V-BADPS	Door/Bond Sensor	**442.00**
1581V-TJ81V	Top Jamb kit	**390.00**
1581V-HDB1V	Glass Door kit	**472.00**
1582V	**Double EmLock**	**584.00**
1582V-2DPS	2 Door Sensor	**684.00**
1582V-2BA	2 Bond Sensor	**784.00**
1582V-TJ82V	Top Jamb kit	**780.00**
1582V-HDB2V	Glass Door kit	**944.00**

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

EMLock®
Lifetime Warranty

BHMA CERTIFIED
ANSI/BHMA A156.23
Grade 1

CSFM
3774-0324:100

MEA
City of New York
768-80-SA

1511

1512

1513

1571

1572

1573

1581

1582

EMLOCK® MODELS — GK — LIST

1650lb / 748 kg Holding Force, Automatic Voltage Sensing Input

1511	Single EmLock®	**396.00**
1512	Double EmLock®	**792.00**
1513	Single EmLock®, split armature for pair of doors	**452.00**

1200lb / 544 kg Holding Force, Automatic Voltage Sensing Input

1571	Single EmLock®	**352.00**
1572	Double EmLock®	**704.00**
1573	Single EmLock®, split armature for pair of doors	**408.00**

650lb / 295 kg Holding Force, Automatic Voltage Sensing Input

1581	Single EmLock®	**292.00**
1582	Double EmLock®	**584.00**

SPECIFY FINISH — Add to List

	Anodized Finishes *(Architectural Housing: Add 10.00 per foot to base)*	**Single EmLock**	**Double Emlock**
V	628 Aluminum *(standard)*	**N/C**	**N/C**
X	313 Dark bronze	**48.00**	**80.00**
Y	335 Black	**48.00**	**80.00**
	Plated Finishes *(Architectural Housing: Consult Factory)*		
C	605 Bright brass	**190.00**	**220.00**
D	606 Dull brass	**190.00**	**220.00**
F	611 Bright bronze	**190.00**	**220.00**
G	612 Dull bronze	**190.00**	**220.00**
P	625 Bright chrome	**190.00**	**220.00**
Q	626 Dull chrome	**190.00**	**220.00**

SPECIFY OPTIONS — Add to List

See Modular Program price list when ordering separately for field upgrades. Different part numbers and pricing apply.

T	Adjustable timer. Built in field adj. 0-30 sec. re-lock delay. **Specify one for single or double EmLocks®** *(not available with 1580 series)*	**64.00**
D	Door position sensor. Indicates door open and door closed. **Specify two for double EMLocks®** *(not available with 1513 and 1573)* SPDT Dry, 250 mA @ 30VDC.	**50.00**
B	Magnetic bond sensor. Indicates locked with full holding power and unlocked, low holding power, low voltage, tampering and obstruction between armature and magnetic core. **Specify (2) for double EmLocks** *(Not available with 1513 and 1573)* • 1510 & 1570 Series: SPDT Dry, 250 mA @ 30VDC. • 1580 Series: SPST N.O., Dry, 250 mA @ 30VDC.	**100.00**
L	Tri-color status LED indicator. Field selectable Red, Green, Amber. Indicates lock energized when wired to lock input. Indicates de-energized/unlocked **or** "Enter/Go" when wired to built-in TD Module Indicates energized **and** de-energized **or** "Enter/Go" when wired to access control auxiliary output. Indicates door is closed **and** locked **and** door is unlocked when wired to BA.	**16.00**
A	Anti-tamper sensor. Indicates access cover removal. SPDT Dry, 1 Amp @ 30VDC	**50.00**

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

SPECIFY TOP JAMB MOUNTING BRACKETS

GK Add to List

Kits for 1200lb and 1650 lb Locks

TJ1	Single	**98.00**
TJ2	Double	**196.00**

Kits for 650lb Locks

TJ81	Single	**98.00**
TJ82	Double	**196.00**



Anodized Finishes					**Single Top Jamb**	**Double Top Jamb**
V 628 Aluminum (std)	**N/C**	**X** 313 Dark Bronze	**Y** 335 Black		**60.00**	**120.00**
Plated Finishes						
C 605 Bright Brass		**D** 606 Dull Brass	**F** 611 Bright Bronze		**190.00**	**220.00**
G 612 Dull Bronze		**P** 625 Bright Chrome	**Q** 626 Dull Chrome		**190.00**	**220.00**

SPECIFY GLASS DOOR MOUNTING KIT

GK Add to List

- Universal glass door kits are compatible with lock models, except 1513 and 1573
- Field adjustable for 1/2", 5/8" and 3/4" all glass Herculite doors

Kits for 1511, 1571, 1581

HDB1	Single	**180.00**

Kits for 1512, 1572, 1582

HDB2	Double, 2 single kits	**360.00**



Anodized Finishes					**Single**	**Double**
V 628 Aluminum (std)	**N/C**	**X** 313 Dark Bronze	**Y** 335 Black		**60.00**	**80.00**
Plated Finishes						
C 605 Bright Brass		**D** 606 Dull Brass	**F** 611 Bright Bronze		**100.00**	**200.00**
G 612 Dull Bronze		**P** 625 Bright Chrome	**Q** 626 Dull Chrome		**100.00**	**200.00**

SPECIFY ARCHITECTURAL HOUSINGS

GK Add to List

Full Width Housings - appear as part of the frame to provide a superior architectural appearance.
Vertical Housings - Side jamb mount, accommodates two 1571 or two 1511 EMLocks® providing 2400 or 3300 lbs of holding force.
Compatible with Models: 1511, 1512, 1571, 1572 with or without HDB kits.
Specify housings with your EMLocks®.

Single Door Housing

30	30" Lock housing	**312.00**
36	36" Lock housing	**312.00**
40	40" Lock housing	**312.00**
48	48" Lock housing	**312.00**
CH	Custom length. Specify exact length	**POA**

Double Door Housing

60	60" Lock housing	**500.00**
72	72" Lock housing	**500.00**
84	84" Lock housing	**500.00**
96	96" Lock housing	**500.00**
CH	Custom length. Specify exact length	**POA**

Vertical Housings

82	82" high opening	**500.00**
CV	Custom length. Specify exact length	**POA**

See page 25 for special finish designation and finish price

DRILL FIXTURE

LIST

1511DF	Heavy duty drill fixture for 1571 and 1511	**150.00**
1581DF	Heavy duty drill fixture for 1580	**150.00**
BN-PT	Blind Nut Placement Tool	**120.00**
BN-50	Blind Nuts, 10/32, 50 Pack	**50.00**

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

UNIVERSAL HEADER BRACKET c UL us LISTED GK

Used in lieu of angle brackets, the Universal Header Bracket provides a faster mounting solution, saving time and labor costs for several EmLock models. Reduce potential for mis-sized and misaligned mounting holes, broken taps, removal of broken taps. Combined with interlocking E-Z mount assembly, save up to a half days labor with the installation of 12 locks.

Features

- Solid 1" bar provides higher security and superior aesthetics.
- Machined wire chase provides concealed and secure wiring
- Multiple pre-drilled and tapped mounting holes to accommodate the use of several different locks on either 4" or 4.5" aluminum frames



UB11	Bracket for 1511, 1513, 1571, 1573. Dimensions: 1" x 1" x 11"	**64.00**
UB12	Bracket for 1512 and 1572. Dimensions: 1" x 1" x 22"	**128.00**



NEW



SPECIFY FINISH — Add to List

V 628 Aluminum *(standard)*				**N/C**
C 605 Bright Brass	**D** 606 Dull Brass	**F** 611 Bright Bronze	**G** 612 Dull Bronze	**30.00**
P 625 Bright Chrome	**Q** 626 Dull Chrome	**X** 313 Dark Bronze	**Y** 335 Black	**30.00**

ALUMINUM SPACER BRACKET & CONCRETE PLATE - PRE DRILLED & TAPPED GK LIST

UF11V

UF81V



NEW

Application

- Aluminum frames with blade stop - lowers EmLock below blade stop
- Concrete filled hollow metal frames - provides multiple points for concealed wire entry

Features

- Pre-drilled and tapped specifically for 1510, 1570, 1580 EmLock
- Machined wire chase provides multiple points for concealed wire entry from concrete filled frames.

UF11V	Bracket for 1511, 1513, 1571, 1573. Dimensions: 1/2" x 1-1/2" x 11"	**90.00**
UF12V	Bracket for 1512 and 1572. Dimensions: 1/2" x 1-1/2" x 22"	**112.00**
UF81V	Bracket for 1581. Dimensions: 1/2" x 1-1/4" x 8-3/4"	**72.00**
UF82V	Bracket for 1582. Dimensions: 1/2" x 1-1/4" x 17-1/2"	**100.00**

ARMATURE MOUNTING PLATE GK LIST

AR11V

NEW

The AR Mounting plate provides a solution for mounting the EmLock armature to the top rail of aluminum, glass, wood and hollow metal doors that do not permit the use of thru bolts.

AR11V	Armature mounting plate for 1511, 1571 Specify two for models 1512, 1572	**60.00**







SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

FILLER PLATES — GK

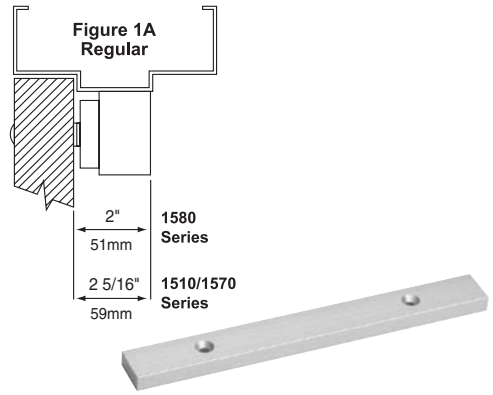

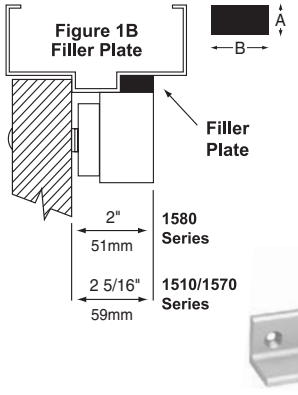

FILLER PLATES: For extension of the stop to provide a proper mounting surface on the underside of the header **See Figure 1B**.

FOR 8-3/4" (222mm) SINGLE EMLOCK MODELS — **GK**
1581, 101V81S, 101A81S, 101V81T, 101A81T

PART #	A x B	LIST
FP01	1/8" x 1-1/4" (3 x 32mm)	**30.00**
FP02	1/4" x 1-1/4" (6 x 32mm)	**32.00**
FP03	3/8" x 1-1/4" (10 x 32mm)	**34.00**
FP04	1/2" x 1-1/4" (13 x 32mm)	**36.00**
FP05	5/8" x 1-1/4" (16 x 32mm)	**36.00**

FOR 11" (279mm) SINGLE EMLOCK MODELS
1511 1511S 101A71S 101V71S
1513 1571 1511T 101A71T 101V71T

PART #	A x B	LIST
FP11	1/8" x 1-1/4" (3 x 32mm)	**33.00**
FP12	1/4" x 1-1/4" (6 x 32mm)	**34.00**
FP13	3/8" x 1-1/4" (10 x 32mm)	**34.00**
FP14	1/2" x 1-1/4" (13 x 32mm)	**38.00**
FP15	5/8" x 1-1/4" (16 x 32mm)	**40.00**

FOR 17-1/2" (445mm) DOUBLE EMLOCK MODEL
1582

PART #	A x B	LIST
FP30	1/8" x 1-1/4" (3 x 32mm)	**38.00**
FP31	1/4" x 1-1/4" (6 x 32mm)	**40.00**
FP32	3/8" x 1-1/4" (10 x 32mm)	**42.00**
FP33	1/2" x 1-1/4" (13 x 32mm)	**44.00**
FP34	5/8" x 1-1/4" (16 x 32mm)	**46.00**

FOR 22" (559mm) DOUBLE EMLOCK MODELS
1512 1572 1512D

PART #	A x B	LIST
FP21	1/8" x 1-1/4" (3 x 32mm)	**38.00**
FP22	1/4" x 1-1/4" (6 x 32mm)	**40.00**
FP23	3/8" x 1-1/4" (10 x 32mm)	**42.00**
FP24	1/2" x 1-1/4" (13 x 32mm)	**44.00**
FP25	5/8" x 1-1/4" (16 x 32mm)	**46.00**

ANGLE BRACKETS — GK

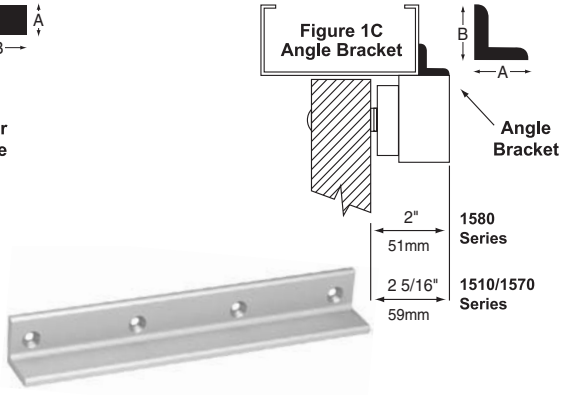

ANGLE BRACKETS: Used as extension on shallow door frames to provide adequate mounting surface.
See Figure 1C.

FOR 8-3/4" (222mm) SINGLE EMLOCK MODELS — **GK**
1581, 101V81S, 101A81S, 101V81T, 101A81T

PART #	A x B	LIST
AB01	1" x 1" (25 x 25mm)	**38.00**
AB02	1" x 1-1/2" (25 x 38mm)	**40.00**
AB03	1-1/2" x 1-1/2" (38 x 38mm)	**42.00**
AB04	2" x 1-1/2" (51 x 38mm)	**44.00**

FOR 11" (279mm) SINGLE EMLOCK MODELS
1511 1511S 101A71S 101V71S
1513 1573 1511T 101A71T 101V71T

PART #	A x B	LIST
AB11	1" x 1" (25 x 25mm)	**40.00**
AB12	1" x 1-1/2" (25 x 38mm)	**42.00**
AB13	1-1/2" x 1-1/2" (38 x 38mm)	**44.00**
AB14	2" x 1-1/2" (51 x 38mm)	**46.00**

FOR 17-1/2" (445mm) DOUBLE EMLOCK MODEL
1582

PART #	A x B	LIST
AB30	1" x 1" (25 x 25mm)	**50.00**
AB31	1" x 1-1/2" (25 x 38mm)	**54.00**
AB32	1-1/2" x 1-1/2" (38 x 38mm)	**58.00**
AB33	2" x 1-1/2" (51 x 38mm)	**62.00**

FOR 22" (559mm) DOUBLE EMLOCK MODELS
1512 1572 1512D

PART #	A x B	LIST
AB21	1" x 1" (25 x 25mm)	**50.00**
AB22	1" x 1-1/2" (25 x 38mm)	**54.00**
AB23	1-1/2" x 1-1/2" (38 x 38mm)	**58.00**
AB24	2" x 1-1/2" (51 x 38mm)	**62.00**

SPECIFY FINISH — Add to List

				Single EmLock N/C	Double EmLock N/C
V 628 Aluminum *(standard)*					
Special Finishes					
C 605 Bright Brass	**G** 612 Dull Bronze	**X** 313 Dark Bronze		**30.00**	**60.00**
D 606 Dull Brass	**P** 625 Bright Chrome	**Y** 335 Black			
F 611 Bright Bronze	**Q** 626 Dull Chrome				

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

GATE EMLOCK® c UL us LISTED — GK

1575

1576



1576-BK



1576-MP

Holding Power 1200lbs.

Specify Voltage: 12 or 24 VDC (0.25Amp @ 12VDC or 24VDC)
Finish: **N** Nickle Plated Stainless Steel finish *(standard)*
Dimentions: 9-3/4"L x 2-1/2"H x 1-1/2"D

MODEL	DESCRIPTION	LIST
157512N	Single EMLock® 12VDC with 1/2" x 3/4" conduit fitting	**380.00**
157524N	Single EMLock® 24VDC with 1/2" x 3/4" conduit fitting	**380.00**
157612N	Single EMLock® 12VDC face drilled mounting holes with 1/2" x 3/4" conduit fitting	**380.00**
157624N	Single EMLock® 24VDC face drilled mounting holes with 1/2" x 3/4" conduit fitting	**380.00**

ACCESSORIES — Add to List

NEW

MODEL	DESCRIPTION	LIST
1576-BK	Mounting Bracket for 1576	**68.00**
1576-MP	Mounting Plate for 1576	**48.00**

1583 MICRO CABINET EMLOCK® — GK

1583

Holding Power 300lbs.

Dual voltage: 500/250 mA @ 12/24 VDC
Dimensions: Lock 6-1/2"L x 1-1/8"W x 1-1/4"H
Armature 5-1/8"L x 1-1/8"W x 1/4"H

MODEL	DESCRIPTION	LIST
1583V	Micro EMLock® for cabinets, drawers and lockers	**180.00**

1591 MORTISE EMLOCK® c UL us LISTED — GK

1591

Holding Power 850lbs.

Specify Voltage: 12 or 24 VDC (0.50Amp @ 12VDC, 0.35Amp @ 24VDC)
Finish: **V** 628 Aluminum Anodized *(standard)*
Dimensions: 10"L x 1-7/16"H x 1-1/2"D

MODEL	DESCRIPTION	LIST
1591	Single EMLock® for sliding doors	**320.00**

ACCESSORIES — Add to List

LAB	Surface mount armature angle bracket for 1591 on sliding doors	**48.00**
AMP	Armature mounting plate for leading edge of door	**40.00**
DPS	Door position sensor for 1591 EMLock®	**50.00**

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

EMLock®
Lifetime Warranty

c UL us LISTED
GWXT Auxiliary Locks CVXJ Burglary Resistant Electrically Operated Door Lock

UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"

Features
- Door static and relock sensor, detects door is closed, at rest and aligned before relocking
- Automatic voltage sensing input
- Lateral and vertical alignment adjustment
- Floating armature with alloy steel shear tabs

Electrical Specifications
- 1561 and 1562: 650/350 mA @ 12/24VDC Auto-Sensing
- 1565 and 1566: 800/400 mA @ 12/24VDC Auto-Sensing


1561

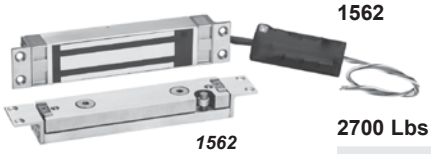
1562

CONCEALED HI/Shear EMLock — List

2000 Lbs Holding Force, 8" x 1-1/2" Lock

1561	1-5/8" depth, integrated electronics for 1-3/4" to 2" frames	**696.00**
1562	1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4" frames	**680.00**

2700 Lbs Holding Force, 10-7/16" x 1-1/2" Lock

1565	1-5/8" D depth, integrated electronics, for 1-3/4" to 2" frames	**740.00**
1566	1-1/4" D depth, external electronics, for 1-1/4" to 1-1/2" frames	**720.00**

1565

SPECIFY ARMATURE — Add to List

Armature supplied with lock. Specify type required: 1565/1566 ITC, FTC or HTC
1561/1562 ITCM, FTCM or HTCM

ITC	Standard mounting armature kit for aluminum and hollow metal doors with 7/8" to 1-1/8" deep top channels, wood doors and factory prepared hollow metal flush edge doors.	**N/C**
FTC	Mounting kit for field prepared horizontal mounting in hollow metal doors with flush edge.	**N/C**
HTC	Mounting kit for 1-15/16" deep herculite channels	**N/C**

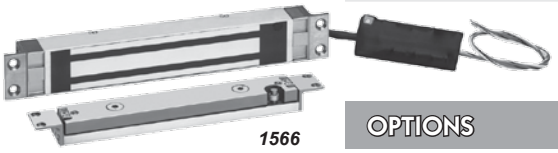
1566

OPTIONS — Add to List

HTR	Herculite top rail armature adjustment bracket for leading edge adjustments.	**210.00**
BAS	Bond sensor indicates proper armature contact and reduced holding power due to improper armature contact or tampering. SPDT 0.25 Amp maximum *(not available on 1562 and 1566)*	**110.00**
DPS-1	Door position switch indicates door open or closed. SPDT 0.25 Amp maximum.	**40.00**
L-3	External LED status indicator, mounts separately through the frame and may be used to indicate lock is energized or wired to BAS bond sensor for door status.	**16.00**
WDRB	Wood door reinforcement box for 1565 and 1566	**40.00**
WDRBM	Wood door reinforcement box for 1561 and 1562	**40.00**


HTR


WDRB

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

EMLock®
Lifetime Warranty

BHMA CERTIFIED
ANSI/BHMA A156.23
Grade 1

3774-0324:100

MEA
City of New York
768-80-SA

1562SC

1562SCHDB

SEMI CONCEALED HI/SHEAR LOCKS — List

2000 Lbs Holding Force, 8" x 1-1/2" x 1-1/4" Lock

1562SC	1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4 For Hollow metal frames	**820.00**
1562SCHDB1/2	1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4" frames For 1/2" Herculite full glass doors	**1,000.00**
1562SCHDB3/4	1-1/4" depth, with external electronics, for 1-1/4" to 1-3/4" frames For 3/4" Herculite full glass doors.	**1,000.00**

1561S

1561TJ

SURFACE MOUNT HI/SHEAR LOCKS — List

2000 Lbs Holding Force, 8" x 1-5/8" x 1-3/4" Lock
For Hollow metal frames and wood or hollow metal doors

1561S	Surface mount for the push side of the door with integrated electronics	**868.00**
1561TJ	Surface top jamb mount for the pull side of the door with integrated electronics	**868.00**

STANDARD FINISH — Add to List

Surface housing

V	628 Anodized Aluminum	**N/C**

OPTIONS — Add to List

BAS	Bond sensor indicates proper armature contact and reduced holding power due to improper armature contact or tampering. SPDT 0.25 Amp maximum *(not available on 1562 and 1566)*	**110.00**
DPS-1	Door position switch indicates door open or closed. SPDT 0.25 Amp maximum.	**40.00**
L-3	External LED status indicator, mounts separately through the frame and may be used to indicate lock is energized or wired to BAS bond sensor for door status.	**16.00**

Price List Effective January 1, 2006
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com
SDC

1511S / T VOICE & DIGITAL ANNUNCIATION

The Exit Check® 1511S series incorporates an **alternating 85 db tone and voice message** with a **digital countdown display** and sign that provides clear and comprehensive instructions for persons without prior knowledge of door operation. This is especially significant for those who are **blind or hearing impaired.**

FIELD SELECTABLE ACTUATION

- Door Movement
- Exit Sense Bar
- Exit Device Switch Kit (See page 51)
- Latch Monitoring Strike (See page 51)

1650 lbs Holding Force Standard
830/450 mA @ 12/24VDC (single)

NEW

1200 lbs Energy Saver Option E
380/225 mA @ 12/24VDC (single)
Control more locks with fewer power supplies
Save on electricity consumption and power supply investment

SINGLE MODEL

For use with single doors equipped with Exit Sense Bars, surface vertical rod, concealed vertical rod, mortise and rim mount exit devices, mortise locksets and cylindrical locksets.

1511S

NEW

- Voice & Digital Display Standard
- Energy Saver Optional

TANDEM MODEL

For use with pairs of doors equipped with Exit Sense Bars, surface mounted vertical rod exit devices and concealed vertical rod exit devices with surface mounted triggers and strikes. **Activating either door unlocks both doors.**



1511T



DOUBLE MODEL POA Consult Factory

For use with pairs of doors equipped with Exit Sense Bars, mortise, rim and concealed vertical rod exit device with concealed strikes and triggers, mortise locksets and cylindrical locksets. **Activating either door unlocks both doors.**

1512D



ELECTRICAL SPECIFICATIONS

Input Voltage: Auto Voltage Sensing
12/24VDC ± 10%

Standard 1650 lbs holding force
1511S 830/450 mA @ 12/24VDC
1511T 1500/850 mA @ 12/24VDC

Energy Saver E Option 1200 lbs Holding Force
1511S 400/275 mA @ 12/24VDC
1511T 650/400 mA @ 12/24VDC

CONTROL INPUTS

Request to Exit: Normally open, dry

Fire Alarm Release: Alarm panel closed dry contact. Opening of contact releases lock.

MONITORING OUTPUTS

Alarm Output:
SPDT Dry, 1 Amp @ 30VDC

Lock Secure / Unlocked Output:
SPDT Dry, 1 Amp @ 30VDC

DPS Door Position Status: (option)
SPDT Dry, 250 mA @ 30VDC

BAS Magnetic Bond Status: (option)
SPDT Dry, 250 mA @ 30VDC

ATS Anti Tamper Sensor: (option)
SPDT Dry, 1 Amp @ 30VDC

DIMENSIONS

Single: 11" L x 2 3/4" H x 2 5/8" D
(279 L x 70 H x 67 D mm)

Tandem: Master: 11" L x 2 3/4" H x 2 5/8" D
(279 L x 70 H x 67 D)
Slave: 11" L x 2 3/4" H x 2 5/8" D
(279 L x 70 H x x 67 D mm)

Armature: 7 3/8" L x 2 3/8" H x 9/16" D
(187 L x 60 H x 14 D mm)

Sign: 13" L x 4 1/2" H
(330 L x 114 H mm)

STANDARD DELAYED EGRESS MODEL NUMBERS

UBC, SBC, IBC, IFC, NFPA 101, NFPA 1-UFC, California Building Code/OSHPD* Compliant	BOCA Compliant	Chicago Compliant
1511S ND K V Single	**1511S BD K V** Single	**1511S CD K V** Single
1511T ND K V Tandem	**1511T BD K V** Tandem	**1511T CD K V** Tandem

SDC SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

*Office of Statewide Health Planning & Development (California)

c UL us LISTED
FWAX Special Locking Arrangements
GWXT Auxiliary Locks

UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"

BHMA CERTIFIED
ANSI/BHMA A156.24
Grade 1

CSFM
3774-0324:103

1511S

NEW
- Voice & Digital Display Standard
- Energy Saver Optional

702-6R

101-1A

101-4AM

928

Controls & Annunciators
See page 38

TCC

RCC

Annunciator Consoles
See page 54

PT-3

MS-16

Accessories
See page 51 & 53

SPECIFY MODEL — LIST

1511S	Single - Voice, tone and digital countdown annunciator, 1650 lbs	**950.00**
1511T	Tandem - Voice, tone and digital countdown annunciator, 1650 lbs	**1650.00**

SPECIFY OPERATION

ND	UBC, California Building Code OSHPD, NFPA 101, NFPA 1-UFC, SBC, IBC, IFC Compliant 15 second fixed exit delay, adjustable 0, 1, 2, 3, second nuisance delay	**N/C**
NH	NFPA 101, NFPA 1 - UFC, SBC, IBC, IFC Compliant 30 second fixed exit delay, adjustable 0, 1, 2, 3, second nuisance delay	**N/C**
NA	NFPA, UFC, SBC, IBC, IFC Compliant 15 or 30 sec. adjustable exit delay, adjustable 0, 1, 2 or 3 sec. nuisance delay, built in or remote manual reset.	**N/C**
BD	BOCA National Building Code Compliant 15 second fixed exit delay, 1 second nuisance delay, auto reset 30 second after door closure* *45 seconds when AHJ approved.	**N/C**
CD	Chicago Building Code Compliant. Contains no moving parts. 15 sec. fixed exit delay, 1 sec. nuisance delay, auto reset 30 secs after door closure.	**N/C**

SPECIFY BUILT IN RESET & CONTROL

K	Built in key switch. Provides 1-30 second timed bypass, sustained bypass and alarm reset *(std)* Built in reset not available with BOCA and Chicago operation.	**N/C**
P	Built in reset push switch. Available with NFPA (NA) only.	**N/C**
L	Less key or push switch *(no price deduction)*	**N/C**

SPECIFY FINISH — Add to List

				Single	Tandem
Anodized Finishes					
V	628 Aluminum *(standard)*			**N/C**	**N/C**
X	313 Dark Bronze			**42.00**	**84.00**
Y	335 Black			**42.00**	**84.00**
Special Plated Finishes					
C	605 Bright Brass	**G**	612 Dull Bronze	**180.00**	**220.00**
D	606 Dull Brass	**P**	625 Bright Chrome	**180.00**	**220.00**
F	611 Bright Bronze	**Q**	626 Dull Chrome	**180.00**	**220.00**

OPTIONS — Add to List

E	Energy Saver, 1200 lbs holding force, low power consumption, electrical specs page 32	**N/C**
D	Door position status. Provides remote monitoring of the door open or closed status and indicates the door has actually been opened for egress after alarm activation. Specify 2 for tandem and double	**50.00**
B	Magnetic bond alert sensor. Indicates locked or unlocked, reduced holding power, tampering or foreign material between the electromagnet and armature. Specify 2 for tandem and double	**100.00**
A	Anti-tamper switch. Detects attempt to remove the access cover. Specify 2 for tandem	**40.00**
VI	Spanish, or English and Spanish, or English and French verbal announcement	**100.00**
VIC	Custom verbal announcement *(10 piece purchase minimum)*	**POA**

Sure Exit Push Bar
See page 50

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

EXIT CHECK MINI DELAYED EGRESS EMLOCK®

UL LISTED

GKK LIST

1581S

c UL us LISTED

FWAX Special Locking Arrangements
GWXT Auxiliary Locks

ANSI/BHMA A156.24 Grade 1

CSFM

3774-0324:103

1581S	Single Mini Delayed Egress Lock 650lbs holding force	**695.00**
	Specify 2 for pairs of doors Remote reset control required. See below.	

SPECIFY OPERATION

ND	UBC, California Building Code/OSHPD, NFPA 101, NFPA 1-UFC, SBC, IBC, IFC Compliant 15 second fixed exit delay, 2 second nuisance delay	**N/C**
NH	NFPA 101, NFPA 1 - UFC, SBC, IBC, IFC Compliant 30 second fixed exit delay, 2 second nuisance delay	**N/C**
BD	BOCA National Building Code Compliant 15 second fixed exit delay, 1 second nuisance delay, auto reset 30 second after door closure	**N/C**
BH	BOCA National Building Code Compliant 30 second fixed exit delay, 1 second nuisance delay, auto reset 30 second after door closure	**N/C**

SPECIFY FINISH

Add to List

Anodized Finishes

V	628 Clear Anodized Aluminum *(standard)*	**N/C**
X	313 Dark Bronze Anodized	**48.00**
Y	335 Black Anodized	**48.00**

Special Plated Finishes

C	605 Bright Brass	**190.00**	**G**	612 Dull Bronze	**190.00**
D	606 Dull Brass	**190.00**	**P**	625 Bright Chrome	**190.00**
F	611 Bright Bronze	**190.00**	**Q**	626 Dull Chrome	**190.00**

928

SPECIFY OPTIONAL OUTPUT

Add to List

D	Door position status	**60.00**
B	Magnetic bond sensor	**100.00**

SPECIFY CABLE FOR DOUBLE DOORS

Add to List

Required when using two locks on a pair of doors, cables enable slave operation.

TC-3	Cable kit for connecting two locks through the frame header	**20.00**
TC-10	Cable kit for connecting wiring for two locks in a remote junction box	**24.00**

728

702R

SPECIFY STATION CONTROLS

Add to List

Select Reset Station for ND and NH functions
Reset not required for BD and BH function

928	EntryCheck™ digital keypad, 480 user codes Keyless Reset / manual power up / bypass	**140.00**
728	Key switch, 2 keys, 1 gang Reset / manual power up / sustained bypass	**60.00**
728L	Key switch, 2 keys, 1 gang, LED status indicator Reset / manual power up / sustained bypass	**84.00**
702R	Key switch assembly, 1 gang, less cylinder Reset / manual power up / momentary bypass	**92.00**
101-AK	Key switch assembly, 2 gang, LED status indicator, less cylinder Reset / manual power up / sustained bypass	**310.00**
101-4AM	Four station remote annunciator	**290.00**

101-4AM

101-AK

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

Proprietary Verbal Exit Instructions with Alarm Tone and 1" Digital Countdown Display

"Security Industry Finest" ISC Expo

Standard features include: 12/24VDC voltage sensing input, delay electronics packaged on a two-gang wall plate for recessed wall mounting and junction box for surface wall mounting. Features include: Key switch for violation reset, momentary bypass and on-off; status outputs, remote control inputs.

Choice of door movement sensor activation or manual activation by non-latching REX bar.

- Doors **WITH** latch assemblies are sensor activated and do not require power transfer or trigger switch in exit device. Where preferred a trigger switch may be added to the exit device for manual activation in lieu of door movement activation.
- Doors **WITHOUT** latches require a non-latching Request-to-Exit Bar PSB560 Sure Exit® or MSB550 Switch Bar (page 50) Power transfer device PT-2 armored loop or PTH-4 power transfer hinge (page 53).
- Standard monitoring outputs indicate lock energized, lock de-energized, exit in progress and authorized egress.

101V81S

101V81T

SPECIFY BASE MODEL — LIST

Mini Delayed Egress - 650lbs holding force

101V81S	Single, 660/440mA@ 12/24VDC	**1072.00**
101V81T	Tandem, 1.1A/660 mA @ 12/24VDC Two separate EmLocks® for pairs of doors. Pushing either door unlocks both doors.	**1512.00**

POWER SAVER Delayed Egress - 1200lbs holding force

101V71S	Single, 1200lbs holding force, 470/350mA @ 12/24VDC	**1112.00**
101V71T	Tandem, 1200lbs holding force, 720/470mA @ 12/24VDC Two separate EmLocks® for pairs of doors. Pushing either door unlocks both doors.	**1600.00**

SPECIFY CODE COMPLIANT EXIT DELAY MODE

ND	UBC, California Building Code/OSHPD, NFPA, UFC, SBC, IBC, IFC Compliant Fixed 15 second exit delay, adjustable 0, 1, 2 or 3 second nuisance delay	**N/C**
NH	NFPA 101, NFPA 1-UFC, SBC, IBC, IFC Compliant Fixed 30 second exit delay, adjustable 0, 1, 2 or 3 second nuisance delay	**N/C**
BD	BOCA National Building Code Compliant Fixed 15 second exit delay, 1 second nuisance delay Auto reset 30 seconds after door closure	**N/C**
BH	BOCA National Building Code Compliant 30 sec. fixed exit delay, 1 sec. nuisance delay, auto reset 30 sec. after door closure	**N/C**

SPECIFY FINISH — Add to List

V	628 Clear Anodized Aluminum *(Standard)*		**N/C**
X	313 Dark Bronze Anodized	Single **42.00**	Tandem **84.00**

OPTIONS — Add to List

B	Magnetic bond sensor, indicates locked with full holding force, low holding force, unlocked, tampering and obstructions. Specify two for tandem Exit Check®	**100.00**
D	Door position sensor, indicates door open and door close. Commonly used to verify egress after alarm and exit delay activation. Specify two for tandem Exit Check®	**50.00**
VI	Spanish, or English and Spanish, or English and French verbal announcement*	**100.00**
VIC	Custom verbal announcement *(minimum 10 piece purchase)*	**POA**

c UL us LISTED

FWAX Special Locking Arrangements
GWXT Auxiliary Locks

CSFM 3774-0324:103

BHMA CERTIFIED
ANSI/BHMA A156.24 Grade 1

Electrical Specifications

Voltage input: Auto sensing 12/24VDC
Reset input: NO, Dry
REX input: NO, Dry
Alarm Output: 1A @ 30VDC
Energized Status Output: 1A @ 30VDC

Mechanical Specifications

Controller: 4.625" x 4.5" x 1.5"
650lb Emlock®: 8.75" x 2.125" x 1.25"
1200lb Emlock®: 11" x 2.75" x 1.562"

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

DE6100 Rim Mount

DE6300 Mortise

DE6400 Wood Concealed

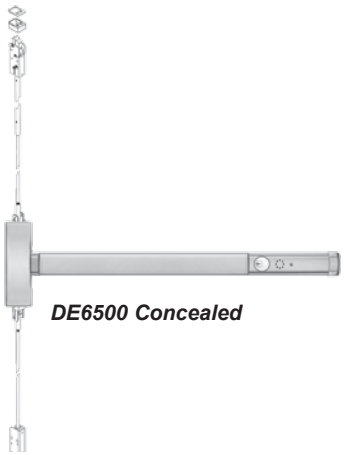

DE6500 Concealed

UL LISTED
Special Locking Arrangement

- Choice of UL Listed Panic or Fire Exit Device
- Complies with UL10C and UBC 7-2
- ANSI/BHMA A156.3 Grade 1 Compliant

Features
- Multiple device networking to reset, arm, alarm and disarm all devices from any device on the same circuit
- Built-in annunciation, 85db tone and LED indicates armed, alarm, authorized access and bypass
- Emergency Release Input
- UBC & California (OSHPD) compliant manual power up
- Built-in keyswitch for reset, bypass & request-to-exit
- Remote reset, bypass, access control, REX & input
- Remote alarm output

Delayed Egress Specifications
Voltage Input: 500 mA @ 24VDC
Door sequencing is not required
Alarm output: SPDT 1 Amp @ 30VDC
Secure Output: SPDT 1 Amp @ 30VDC

Electric Trim Option
Input: 200 mA @ 24VDC
Output: SPDT 2 Amp @ 30VDC
locked/unlocked status
standard with E option

SPECIFY DEVICE TYPE — LIST

DE61	Rim mount exit device	**1833.00**
DE63	Mortise exit device	**2108.00**
DE64	Wood door concealed vertical rod exit device	**2316.00**
DE65	Concealed vertical rod exit device	**2179.00**

Priced less key cylinder. See page 37
Consult factory for special strike requirements

SPECIFY FUNCTION — Add to List

0	Exit Only, No Lever Trim	**N/C**
2	For Dummy Trim with Key Latch retraction (NL Function)	**N/C**
3	For Active Trim with Key Latch retraction (NL Function)	**N/C**

SPECIFY PANIC OR FIRE RATED — Add to List

0	Panic exit device	**N/C**
1	Fire exit device	**110.00**

SPECIFY LENGTH — Add to List

36	For 36" Door	**N/C**
42	For 42" Door	**N/C**
48	For 48" Door	**N/C**

SPECIFY HAND — Add to List

R	Right hand reverse bevel, RHRB	**N/C**
L	Left hand reverse bevel, LHRB	**N/C**

SPECIFY TRIM — Add to List

E Eclipse
ED Eclipse Dummy

G Galaxy
GD Galaxy Dummy

N Nova **252.00**
ND Nova Dummy **252.00**

SPECIFY FINISH — Add to List

U	630 Dull Stainless Steel	**Q**	626 Dull Chrome	**D**	606 Dull Brass	**N/C**
G	612 Dull Bronze	**H**	613 Oil Rubbed Bronze	**V**	628 Clear Anodized Aluminum	**N/C**
C	605 Bright Brass	**P**	625 Bright Chrome			**56.00**

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

SPECIFY D.E. OPERATION — GKK LIST

ND	UBC, California Building Code, NFPA 101, NFPA 1/UFC, SBC, IBC, IFC Compliant 15 sec. fixed exit delay, adj. 0, 1, 2, 3, sec. nuisance delay UBC and California (OSHPD) compliant manual power up feature	**N/C**
NH	NFPA 101, NFPA 1 - UFC, SBC, IBC, IFC Compliant 30 sec. fixed exit delay, adj. 0, 1, 2, 3, sec. nuisance delay	**N/C**
BD	BOCA National Building Code Compliant 15 sec. fixed exit delay, 1 sec. nuisance delay, auto reset 30 sec. after door closure	**N/C**
BH	BOCA National Building Code Compliant 30 sec. fixed exit delay, 1 sec. nuisance delay, auto reset 30 sec. after door closure	**N/C**

SPECIFY ELECTRIC OPTIONS — Add to List

928

Access Control

E	Electric Device Lock/Unlock. Exterior access control capability locks and unlocks outside trim, failsecure standard, field reversible for failsafe operation. Input: 200 mA @ 24VDC Output: SPDT 2 Amp @ 30VDC locked/unlocked status standard with E option	**418.00**

Monitoring

L	Latchbolt status output, SPDT, 1.5 Amp @ 30VDC	**POA**

SPECIFY POWER SUPPLY FOR UL COMPLIANCE — List

101-4AM

Door sequencing is not required		Power Supply Capacity Less E Option	Power Supply Capacity With E Option	
602RF	1 Amp 12/24VDC Class 2 power supply	2 max	1 max	**200.00**
632RF	2 Amp 12/24VDC Class 2 power supply	4 max	2 max	**390.00**

See page 42 for battery backup, options and door control modules

KEY CYLINDERS — List

602RF

Two key cylinders may be required for each exit device. Key cylinders may be provided by SDC or by others.

- All Exit Devices require at least one (1-1/8") Mortise Key Cylinder for electronic operation of alarm reset, momentary bypass and sustained bypass.
- A second key cylinder is required with Dummy and Active Trim Functions 2 and 3 for exterior mechanical key operation
- Exit Only Function 0 does not require a mechanical key cylinder on the exterior

CYL-6PKD	6 pin mortise cylinder, 2 keys, keyed different, 1-1/8". For mortise device	**30.00**
RIM-6PKD	6 pin rim cylinder, 2 keys, keyed different. For rim and vertical rod devices	**30.00**

Keyed Alike POA

SPECIFY POWER TRANSFER DEVICE — List

PT-3

PT-3	Stainless steel armored power transfer loop with aluminum termination box *(Special finish not available)*	**36.00**
PTH-4Q	4 wire power transfer hinge: 1-pair 1 Amp; 1-pair 250 mA *(specify finish below)* UL10B Listed for use with up to 3 hour fire rated doors	**150.00**
PTH-10Q	10 wire power transfer hinge: 1-pair 1 Amp; 4-pair 250 mA (specify finish below) UL10B Listed for use with up to 3 hour fire rated doors Required for applications with remote status outputs or remote control inputs	**195.00**

PTH

See details page 14

REMOTE KEYPAD AND ANNUNCIATION — List

928	EntryCheck digital keypad. Provides keyless reset, manual power up and bypass.	**140.00**
101-1A	One Station remote annunciator	**96.00**
101-4AM	Four station remote annunciator	**310.00**

See page 54 for more details about remote desk top control consoles
See page 38 for more details about remote wall mount annunciators

LOCAL AND REMOTE CONTROLS AND ANNUNCIATORS

		CK	LIST
928	Keyless Reset and Bypass or Momentary Authorized Access 480 User Codes	**JK**	**140.00**
702R-6	Separate wall mount reset key switch assembly Accepts standard 1-1/8" to 1-1/4" *(Mortise key cylinder not included)*		**92.00**
707R-6	Remote reset key switch with dual function for Bypass (authorized egress) and reset (2) MO SPDT dry contact, 6Amp @ 30VDC max Accepts standard 1-1/8" to 1-1/4" mortise key cylinder. *(Mortise key cylinder not included)*		**134.00**
708R-6	Remote reset key switch for bypass (on/off) and reset (1) Maintain (1) MO, SPDT dry contact, 6Amp @ 30VDC max Accepts standard 1-1/8" to 1-1/4" mortise key cylinder. *(Mortise key cylinder not included)*		**138.00**
101-1A	Remote or local single door annunciator with audible alarm and tri-color LED, 1 Gang Green Secure Amber - egress initiated Red - door unlocked		**96.00**
101-4AM	Remote four door annunciator with audible alarm mute button. Four tri-color LEDs, 2 Gang Green Secure Amber - egress initiated Red - door unlocked		**290.00**
101-1AK	Remote or local single door annunciator with 2 function key switch for on/off, reset, audible alarm and tri-color LED, 2 Gang Green - secure Amber - egress initiated Red - door unlocked Accepts standard 1-1/8" to 1-1/4" mortise key cylinder. *(Mortise key cylinder not included)*		**310.00**
101-PAM	Remote single door annunciator with 3 push button switches for momentary access. On/off and audible alarm mute button with tri-color LED, 2 Gang Green - secure Amber - egress initiated Red - door unlocked Recommended for remote installation only		**286.00**

928

702R-6

707R-6

101-1A

708R-6

101-4AM

101-PAM

ACCESSORIES FOR DELAYED EGRESS SYSTEMS

	LIST

The following items are optional components for an integrated Delayed Egress System or Wall mount Delayed Egress Systems

PTH-4
See details Page 14

PTH-4Q	Four (4) Conductor Power Transfer Hinge 28 gauge - 1-pair 1 Amp, 1-pair 250 mA 4.5” x 4.5” standard weight, 626 Dull Chrome	**150.00**
PTH-4Q-DPS	Four (4) Conductor Power Transfer Hinge with Door Status Contact 28 gauge - 1-pair 1 Amp, 1-pair 250 mA @ 12/24V AC/DC Door Status Contact: 250 mA @ 30VDC 4.5” x 4.5” standard weight, 626 Dull Chrome	**186.00**
PTH-10Q	Ten (10) Conductor Power Transfer Hinge 30 gauge - 1-pair 1 Amp, 4-pair 250 mA 4.5” x 4.5” standard weight, 626 Dull Chrome	**195.00**
PTH-10Q-DPS	Ten (10) Conductor Power Transfer Hinge with Door Status Contact 30 gauge - 1-pair 1 Amp, 4-pair 250 mA Door Status Contact: 250 mA @ 30VDC 4.5” x 4.5” standard weight, 626 Dull Chrome	**226.00**

PSB560
MSB550

PSB560V	Sure Exit® sense bar, less latch assembly Required for doors without latch assembly. Aluminum Finish	**340.00**
MSB550-2V	Switch bar with 2 SPDT switches, Aluminum Finish	**200.00**
500-GL KIT	Glass door mounting kit for PSB560, MSB550	**220.00**

PT-3

PT-2

MC-4

PT-2U	Armored flex conduit (less wires)	**18.00**
PT-3V	Armored flex conduit (less wires) with the wire junction box	**36.00**
MC-4	Door position switch	**24.00**

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

Series 50 ANSI Grade 1 Electric Strike, failsecure standard

Specify Voltage: 12VDC or 24VDC.
Current Draw: 12VDC @ 0.30 Amp, 24VDC @ 0.15 Amp.
Standard finish: **U** 630 Stainless steel

UL LISTED

How to Specify:

Model	Voltage	Finish	Option
51-A	24	U	LCM

51-A

52-B
52-C

53-D
53-E

53-F

54-D
54-E

54-F

BR64XL



MT-S

SPECIFY MODEL — LIST

51-A	Cylindrical locks, narrow style locks with deadlatch	**344.00**
52-B	Mortise locks and mortise panic with or without deadlatch	**360.00**
52-C	Mortise locks and mortise panic with or without deadlatch *(Schlage, Sargent, Yale)*	**360.00**
53-D	Mortise locks with deadbolt and latchbolt. When the deadbolt is projected, the strike will not release. Keeper releases latchbolt when deadbolt is retracted.	**364.00**
53-E	Mortise locks with deadbolt and latchbolt. When the deadbolt is projected, the strike will not release. Keeper releases latchbolt when deadbolt is retracted. *(Schlage and Yale)*	**364.00**
53-F	Mortise locks with deadbolt, center deadlatch feature and latchbolt. When the deadbolt is projected, the strike will not release. Keeper releases latchbolt when deadbolt is retracted. *(Schlage, Sargent 8100, Yale)*	**376.00**
54-D	Mortise locks with latchbolt and extended deadbolt. Deadbolt and latchbolt are released	**376.00**
54-F	Mortise locks with deadlatch, latchbold and extended deadbolt. Deadbolt and latchbolt are released. (Schlage, Sargent, Yale)	**376.00**

SPECIFY FINISH — Add to List

U	630 Dull Stainless Steel Standard				**N/C**
Special Finishes					
C	605 Bright Brass	**H**	613 Oil Rubbed Bronze	Functions A, E & F **Add $18.00**	Functions B, C & D **Add $36.00**
D	606 Dull Brass	**P**	625 Bright Chrome		
F	611 Bright Bronze	**Q**	626 Dull Chrome		
G	612 Dull Bronze	**S**	629 Bright Stainless Steel		

OPTIONS — Add to List

FS	Failsafe operation (locked when powered)		**20.00**
LCM	Switch monitors locked, unlocked status		**32.00**
LBM	Latchbolt monitor switch		**54.00**
LCMLBM	Locking CAM and latchbolt monitoring switches		**80.00**
LCBDM	Latchbolt, deadbolt and CAM monitoring switches		**134.00**
BR64XL	Rectifier	**CK**	**20.00**
MT-S	Mounting tabs		**10.00**

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

30 SERIES ELECTRIC STRIKES — FK

Stainless steel electric strike for bored locks, mortise locks or mortise exit devices having 1/2" or 5/8" latchbolts (without deadbolts) or rim-type exit devices. Strike is non-handed, fail secure is standard with fail safe optional. Standard finish is stainless steel 630 (U).

30-2

30-4

SPECIFY MODEL		LIST
30-2-12	Stainless steel electric strike for bored locks, mortise locks or mortise exit devices having 1/2" or 5/8" latchbolts (without deadbolts) - 12VDC@0.51Amp	**436.00**
30-2-24	Stainless steel electric strike for bored locks, mortise locks or mortise exit devices having 1/2" or 5/8" latchbolts (without deadbolts) - 24VDC@0.25Amp	**436.00**
30-4-12	Stainless steel electric strike designed for rim-type exit devices 12VDC@ 0.51Amp	**436.00**
30-4-24	Stainless steel electric strike designed for rim-type exit devices 24VDC@ 0.25Amp	**436.00**

SPECIFY FINISH		Add to List			
U	Dull Stainless Steel *(standard)*	**N/C**			
D	606 Dull brass	**20.00**	**H**	613 Oil rubbed bronze	**20.00**
G	612 Dull bronze	**20.00**	**P**	625 Bright chrome	**20.00**

OPTIONS			Add to List
FS	Failsafe operation (locked when powered) Not for use on fire doors, Non UL		**22.00**
LCM-30	Locking cam monitor		**32.00**
LBM-30	Latchbolt monitor		**54.00**
BR64XL	Rectifier	**CK**	**20.00**

70 SERIES ELECTRIC STRIKES — FK

Stainless steel electric strike for use with bored locks, mortise locks and mortise exit devices having 3/4" (19mm) throw latch bolts. Fits standard 4-7/8" (124mm) cutout with modification. Fail secure is standard and fail safe is optional. Standard finish is stainless steel 630 (U).

NOTE: On retrofit applications, modification of the frame preparation may be required, consult factory.

70-12

70-32

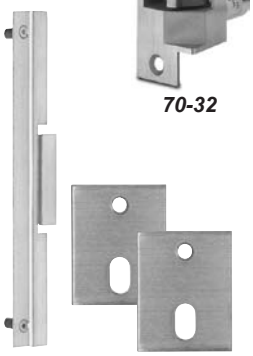

AS *MT-S*

SPECIFY MODEL		LIST
70-12-12	Stainless steel electric strike designed for hollow metal frames 12VDC @ 0.29 Amp	**400.00**
70-12-24	Stainless steel electric strike designed for hollow metal frames 24VDC @ 0.15 Amp	**400.00**
70-32-12	Stainless steel electric strike designed for wood frame or double doors 12VDC @ 0.29 Amp	**400.00**
70-32-24	Stainless steel electric strike designed for wood frame or double doors 24VDC @ 0.15 Amp	**400.00**

SPECIFY FINISH		Add to List			
U	630 Dull Chrome *(Standard)*	**N/C**	**P**	625 Bright Chrome	**20.00**
D	606 Dull Brass	**20.00**	**Q**	626 Dull Chrome	**20.00**
G	612 Dull Bronze	**20.00**	**S**	629 Bright Stainless	**20.00**
H	613 Oil Rubbed Bronze	**20.00**			

OPTIONS			Add to List			
FS	Failsafe operation		**22.00**	**AS**	Astragal	**114.00**
LCM-70	Locking car monitor		**32.00**	**PC**	Plug connector	**24.00**
LBM-70	Latch bolt monitor		**54.00**	**MT-S**	Mounting tabs	**12.00**
BR64XL	Rectifier	**CK**	**20.00**			

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com
SDC

602RF and 631RF(A) tested according to UL Standard 1481, listing includes:
Access Control Systems Unit ALVY
Releasing Device Accessory SYSW
Burglar Alarm Systems Power Supply APHV
Fire and Burglar Alarm Power Supply URTZ

632RF(A), 634RF and 636RF UL listed as:
QQFU/QQFU7 General Purpose Power Supply

UL LISTED

SIA "Security Industry Finest" ISC Expo

Standard Features:
- Modular design
- Filtered and regulated output
- Field selectable 12/24VDC
- Fire/Emergency release input
- Field selectable manual reset input (n/a with 631RF(A))
- Input, output and battery LED status indicators
- Thermal and short circuit protection with auto reset
- Battery charger
- Low battery disconnect

602RF

632RF with optional power cord

631RFA
632RFA

634RF

636RF



12VR

FIELD SELECTABLE 12VDC OR 24VDC OUTPUTS — LIST

602RF	1 Amp class 2 output *(4 outputs optional. See FB4 page 43)*	**200.00**
602RFCUL	c UL Listed for Canada	
631RF	1.5 Amp class 2 output *(4 & 8 outputs optional. See FB4 page 43)*	**315.00**
+631RFA	1.5 Amp class 2 output *(4 & 8 outputs optional. See FB4 page 43)*	**375.00**
***631RFCUL**	c UL Listed for Canada	
632RF	2 Amp class 2 output, *(4, 8 & 12 outputs optional. See FB4 page 43)*	**390.00**
+632RFA	2 Amp class 2 output, *(4, 8 & 12 outputs optional. See FB4 page 43)*	**450.00**
***632RFCUL**	c UL Listed for Canada	
+634RF	4 Amp; Field select one 4 Amp output or two 2 Amp class 2 outputs *(4, 8, 12 & 16 outputs optional. See FB4 page 43)*	**600.00**
+636RF	6 Amp; Field select one 6 Amp output or three 2 Amp class 2 outputs *(4, 8, 12, 16, 20 & 24 outputs optional. See FB4 page 43)*	**700.00**

*c UL Listed Power Supplies include the specific LED & battery status outputs required for Canada

Cabinet Dimensions: 11.5" W x 11.5" H x 3.5" D, 18 GA + 16" W x 14" H x 6.5" D, 16 GA

DUAL 12VDC AND 24VDC OUTPUT CAPABILITY — Add to List

12VR	500mA, 12VDC regulated and filtered output module With the power supply output set at 24VDC for locking devices and components, the addition of the 12VR provides a separate 12VDC 500 mA output for access controls or other 12VDC devices	**50.00**
631RF	One 12VR max. For 500 mA @ 12VDC and 1 Amp @ 24VDC	
632RF	Two 12VR max. Deduct 500 mA from 24VDC 2 Amp output for each 12VR module	
634RF	Two 12VR max. Deduct 500 mA from 24VDC 4 Amp output for each 12VR module	
636RF	Four 12VR max. Deduct 500 mA from 24VDC 6 Amp output for each 12VR module	

OPTIONS — Add to List

MR	Cover mounted manual reset switch for Fire/Emergency release *(not available on 631RF)*	**30.00**
PS-1	System On-Off push switch inside power supply enclosure	**30.00**
PS-1A	System On-Off push switch on enclosure cover	**30.00**
14-2	7 day - skip a day programmable timer. Automatically unlocks and locks all doors or specific doors on programmed days only.	**200.00**
PC	6 ft. power cord. Recommended for 1 Amp and 1.5 Amp, eliminating the need for AC conduit	**28.00**
KL	Key lock cover	**36.00**
220V/230V	230VAC, 50/60Hz	**N/C**

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

MULTIPLE OUTPUT & DOOR CONTROL MODULE — NK



FB-4

Cabinet Control Module Capacity

		ACM-1	CR	CR-4	FB-4	LR	PB	TD	UR
11.25x11.25	Less batteries	2	4	1	2	4	2	4	0
	With batteries	1	2	1	1	2	2	2	0
16x14	Less batteries	4	8	4	4	8	6	8	2
	With batteries	2	6	2	2	6	6	6	1



UR-4

"Security Industry Finest" ISC Expo

UNIVERSAL CONTROLLER & MANTRAP MODULES — LIST

UR-2A	Universal Controller for 2 doors. Field select TD, LR, TD/LR, mantrap A, B, C interlock. Two fused SPDT dry outputs, 5 Amp @ 30VDC. Two SPDT dry outputs, 1 Amp @ 30VDC. Two inputs per station, four auxiliary inputs.	**220.00**
UR-4A	Universal Controller for 4 doors. Field select TD, LR, CR, TD/LR, mantrap A, B interlock. Four fused SPDT dry outputs, 5 Amp @ 30VDC. Four SPDT dry outputs, 1 Amp @ 30VDC. Two inputs per station, four auxiliary inputs.	**310.00**



ACM-1

DOOR CONTROL MODULES — LIST

Modules may be ordered with or without power supplies. Different function modules may be used in the same power supply or cabinet. Contacts: 2.5 Amps inductive, 5 Amps resistive @ 30VDC unless specified otherwise.



CR

NEW *CR4*

FB-4	Fused terminal board. 4 individually fused outputs	**40.00**
TD	1-120 second adjustable time delay. Fused SPDT voltage output, SPDT dry contact.	**165.00**
ACM-1	Access Control Module. One SPDT voltage output, one SPDT status output, eight trigger inputs, (4N/C, 4N/O), LED status indicator.	**90.00**
CR	Control Relay Module. Specify 12VDC or 24VDC. Fused SPDT voltage output SPDT dry contact.	**102.00**
CR4 NEW	Control Board with four relays. Four fused SPDT field selectable wet or dry outputs, four non-fused SPDT outputs, 2 Amps @ 30VDC, four dry contact trigger inputs.	**165.00**
LR	Latching relay module. Specify 12VDC or 24VDC. Fused SPDT voltage output	**118.00**
PB-8	Power booster for high inrush electric panic devices and locks. 1 Amp continuous @ 24VDC, 8 Amp surge output.	**145.00**
PB-16	Power booster for high inrush electric panic devices and locks. 1 Amp continuous @ 24VDC, 16 Amp surge output.	**176.00**



TD

LR



PB-8

BATTERIES — LIST

RB12V4	12V/4AH Battery. Specify in pairs for 24V. 600RF above accommodates four.	**34.00**
RV12V7	12V/7AH Battery. Specify in pairs for 24V. 600RFA above accommodates six	**48.00**

RB12V4

RB12V7

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

TRANSFORMERS c UL us LISTED			V	LIST
TR12	**TR12**	Plug In. 120VAC primary, secondary screw terminals with ground terminal. Output 1: Fused unregulated 12VDC @ 780 mA Output 2: Regulated 12VDC @ 150 mA		**68.00**
TR24	**TR24**	Plug-in. 120 VAC primary, secondary screw terminals. 24VDC, 1 Amp		**48.00**
TP1220	**TP1220**	Plug-in. 120 VAC primary, secondary screw terminals fused. 12VAC, 1.65 Amp		**28.00**
TP2440	**TP2440**	Plug-in. 120 VAC primary, secondary screw terminals fused. 24VAC, 1.65 Amp		**28.00**
TJ2440	**TJ2440**	J Box or base mounted. 120 VAC primary wire leads, secondary screw terminals. 24VAC, 1.65 Amp		**28.00**
TB2450/24100	**TB2450**	Base mounted. 120/240 VAC primary, secondary screw terminals, replaceable secondary fuse. 24VAC, 2 Amp		**76.00**
	TB24100	Base mounted. 120/240VAC primary and secondary screw terminals, replaceable secondary fuse. 24VAC, 4 Amp		**94.00**
	**BR64XL**	Bridge rectifier	**CK**	**20.00**

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

POWER SUPPLY CAPACITY CHART

EMLOCK ELECTROMAGNETIC LOCKS	VOLTS	AMPS	602RF 1 AMP	631RF 1.5 AMP	631RFA 1.5 AMP	632RF 2 AMP	632RFA 2 AMP	634RF 4 AMP	636RF 6 AMP
1511 SINGLE	12VDC	.70A	1	2	2	2	2	5	8
	24VDC	.35A	2	4	4	5	5	11	17
1512 DOUBLE	12VDC	1.40A	0	1	1	1	1	3	4
	24VDC	.70A	1	2	2	2	2	5	8
1561, 1562	12VDC	.65A	1	2	2	3	3	6	9
	24VDC	.35A	2	4	4	5	5	11	17
1565, 1566	12VDC	.80A	1	1	1	2	2	5	7
	24VDC	.40A	2	3	3	5	5	10	15
1571 ENERGY SAVER	12VDC	.25A	4	6	6	8	8	16	24
	24VDC	.125A	8	12	12	16	16	31	48
1572 ENERGY SAVER	12VDC	.50A	2	3	3	4	4	8	12
	24VDC	.25A	4	6	6	8	8	16	24
1575, 1576	12VDC	.25A	4	6	6	8	8	16	24
	24VDC	.25A	4	6	6	8	8	16	24
1581 SINGLE	12VDC	.44A	2	3	3	4	4	9	13
	24VDC	.22A	4	6	6	6	8	18	27
1582 DOUBLE	12VDC	.88A	1	1	1	2	2	4	6
	24VDC	.44A	2	3	3	4	4	9	13
EXIT CHECK INTEGRATED DELAYED EGRESS EMLOCKS									
1581S	12VDC	.50A	2	3	3	4	4	8	12
	24VDC	.32A	3	4	4	6	6	11	18
1511S	12VDC	.83A	1	1	1	2	2	4	6
	24VDC	.45A	2	3	3	4	4	8	12
1511T	12VDC	1.56A	0	0	0	1	1	2	3
	24VDC	.92A	1	1	1	2	2	4	6
1511S With (E) Energy Saver Option	12VDC	.40A	2	3	3	5	5	10	15
	24VDC	.275A	3	5	5	7	7	14	21
1511T With (E) Energy Saver Option	12VDC	.65A	1	2	2	4	4	6	9
	24VDC	.40A	2	3	3	5	5	10	15
EXIT CHECK EMLOCK WITH WALL MOUNT CONTROLLER									
101V71S ENERGY SAVER	12VDC	.47A	2	3	3	4	4	8	12
	24VDC	.35A	2	4	4	5	5	11	17
101V71T ENERGY SAVER	12VDC	.72A	1	2	2	2	2	5	8
	24VDC	.47A	2	3	3	4	4	8	12
101V81S	12VDC	.66A	1	2	2	3	3	6	9
	24VDC	.44A	2	3	3	4	4	9	13
101V81T	12VDC	1.10A	0	1	1	1	1	3	5
	24VDC	.66A	1	2	2	3	3	6	9
101A71S ENERGY SAVER	12VDC	.40A	2	3	3	5	5	10	15
	24VDC	.28A	2	5	5	7	7	14	21
101A71T ENERGY SAVER	12VDC	.65A	1	2	2	3	3	6	9
	24VDC	.40A	2	3	3	5	5	10	15
101A81S	12VDC	.59A	1	2	2	3	3	6	10
	24VDC	.37A	2	4	4	5	5	10	16
101A81T	12VDC	1.03A	1	1	1	1	1	3	5
	24VDC	.59A	0	2	2	3	3	6	10
EXIT CHECK DELAYED EGRESS EXIT DEVICE									
6000	24VDC	.50A	2	N/A	N/A	4	4	N/A	N/A
6000 with E option	24VDC	.70A	1	N/A	N/A	2	2	N/A	N/A

See Electric Strikes, Electric Bolt Locks, Electrified Locksets Page 46

Price List Effective January 1, 2006

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

POWER SUPPLY CAPACITY CHART (continued)

HITOWER ELECTRIC LOCKS	VOLTS	AMPS	602RF 1 AMP	631RF 1.5 AMP	631RFA 1.5 AMP	632RF 2 AMP	632RFA 2 AMP	634RF 4 AMP	636RF 6 AMP
7200	12VDC 24VDC	.60A .30A	1 2	2 5	2 5	3 6	3 6	6 13	10 21
7500 FAIL SAFE	24VDC	.50A	2	3	3	4	4	8	12
7500 FAIL SECURE	24VDC	.80A	1	1	1	3	3	5	7
7800	12VDC 24VDC	.60A .30A	1 2	2 5	2 5	3 6	3 6	6 13	10 20
SPACESAVER ELECTRIC BOLT LOCKS									
100,1000, FS	12VDC 24VDC	.90A .45A	1 2	1 3	1 3	2 4	2 4	4 8	6 12
1100	24VDC	.50A	2	3	3	4	4	8	12
1200	12VDC 24VDC	.90A .45A	1 2	1 3	1 3	2 4	2 4	4 8	6 12
2000	24VDC	4A InRush .50A Cont.	1 1X-PB	*2 1XPB-8	*2 1XPB-8	*4 2XPB-8	*4 2XPB-8	*6 3XPB-8	*8 4XPB-8
ELECTRIC STRIKES									
30	12VDC 24VDC	.51A .25A	1 4	2 6	2 6	3 8	3 8	7 16	11 24
50	12VDC 24VDC	.30A .15A	3 6	5 10	5 10	6 13	6 13	13 26	20 40
70	12VDC 24VDC	.29A .15A	3 6	5 10	5 10	6 13	6 13	13 26	20 40

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Key Cylinder sold separately: **MO -** Momentary **AA -** Alternate Action (on-off)

Keyswitch assemblies compatible with 1.125" and 1.25" U.S. standard key cylinders.

700 *700N* *700T*

800 *800N* *800T*

700-L2

6 AMP KEY SWITCH ASSEMBLIES LIST

20 Guage Stainless Steel Faceplate					Contacts
1 Gang	Narrow	List	2 Gang	List	
701	701N	**82.00**	701T	**102.00**	AA SPDT
702	702N	**80.00**	702T	**100.00**	MO SPDT
704	704N	**140.00**	704T	**160.00**	1-60 Timer SPDT
705	705N	**100.00**	705T	**120.00**	AA DPDT
706	706N	**96.00**	706T	**116.00**	MO DPDT
707	707N	**116.00**	707T	**136.00**	2 MO SPDT
708	708N	**120.00**	708T	**140.00**	1 MO SPDT & 1 AA SPDT
709	709N	**130.00**	709T	**150.00**	2 AA SPDT
710	710N	**180.00**	710T	**200.00**	1-60 Timer & AA SPDT
711	711N	**138.00**	711T	**158.00**	2 MO DPDT
712	712N	**138.00**	712T	**158.00**	1 MO DPDT & 1 AA DPDT
713	713N	**138.00**	713T	**158.00**	2 AA DPDT

1/4" Thick Aluminum Plate			1/4" Thick Stainless Steel Plate					Contacts
1 Gang	Narrow	List	1 Gang	Narrow	List	2 Gang	List	
801AL	801ALN	**122.00**	801	801N	**152.00**	801T	**180.00**	AA SPDT
802AL	802ALN	**120.00**	802	802N	**150.00**	802T	**178.00**	MO SPDT
804AL	804ALN	**180.00**	804	804N	**210.00**	804T	**238.00**	1-60 Timer SPDT
805AL	805ALN	**140.00**	805	805N	**170.00**	805T	**198.00**	AA DPDT
806AL	806ALN	**136.00**	806	806N	**166.00**	806T	**194.00**	MO DPDT
807AL	807ALN	**156.00**	807	807N	**186.00**	807T	**214.00**	2 MO SPDT
808AL	808ALN	**160.00**	808	808N	**190.00**	808T	**218.00**	1 MO SPDT & 1 AA SPDT
809AL	809ALN	**170.00**	809	809N	**200.00**	809T	**228.00**	2 AA SPDT
810AL	810ALN	**220.00**	810	810N	**250.00**	810T	**278.00**	1-60 Timer & AA SPDT
811AL	811ALN	**178.00**	811	811N	**208.00**	811T	**236.00**	2 MO DPDT & 1 AA DPDT
812AL	812ALN	**178.00**	812	812N	**208.00**	812T	**236.00**	1 MO DPDT $ 1 AA DPDT
813AL	813ALN	**178.00**	813	813N	**208.00**	813T	**236.00**	2 AA DPDT

700T-SN-L2

10TD

SPECIFY FINISH Add to List

U	630 Dull Stainless Steel *(Standard For All Key Switches Except The 800AL)*	**N/C**			
V	628 Anodized Aluminum *(Standard For The 800AL Key Switch Only)*	**N/C**			
C	605 Bright Brass	**40.00**	**H**	613 Oil Rubbed Bronze	**40.00**
D	606 Dull Brass	**40.00**	**P**	625 Bright Chrome	**40.00**
F	611 Bright Bronze	**40.00**	**X**	313 Dark Bronze Anodized *(Available For 800ALOnly)*	**40.00**
G	612 Dull Bronze	**40.00**			

OPTIONS Add to List

10TD	Mini timer, adj. 1-60 second 12/24VDC, SPDT	**60.00**	**LT**	One tri color LED. Red, green and amber	**24.00**
CYL-KD	1 1/4" Key cylinder with 2 keys (*keyed different)*	**25.00**	**ATS**	Anti-tamper sensor, SPDT	**30.00**
L1	One LED. Specify red or green	**16.00**	**RMB**	Buzzer, 12 or 24VDC, 20mA	**34.00**
L2	Two LEDs. Red, and green	**24.00**	**SN**	85 db siren, 4V-25VDC, 15mA	**50.00**

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

400 SERIES - 3/4" EXIT SWITCH

OPTIONS - See Page 49 List

400 *400N*

¾" Button - Green Lens - Dull Stainless Steel Finish, Specify R for optional red lens

1 Gang	Narrow	Contact	Sign	
401U	**401NU**	AA (On/Off) SPDT	none	**54.00**
402U	**402NU**	Momentary SPDT	EXIT	**54.00**
403U	**403NU**	With Timer Module 1-60 sec. 12/24V AC/DC, 2A SPDT Contact	EXIT	**112.00**
404U	**404NU**	Momentary DPDT	EXIT	**56.00**
405U	**405NU**	AA (On/Off) DPDT	none	**66.00**

410 SERIES - 1-3/4" x 1" EXIT SWITCH

OPTIONS - See Page 49 List CK

NEW

412N
413N

1¾" x 1" Button - Green Illuminated Lens - Dull Stainless Steel Finish, Specify R for optional red lens

	Narrow	Contact	Sign	
	412NU	Momentary SPDT	PUSH TO EXIT	**64.00**
	413NU	Integrated 1-60 sec Timer 12/24VDC, 2A SPDT Contact	PUSH TO EXIT	**124.00**

420 SERIES - 2" EXIT SWITCH

OPTIONS - See Page 49 List CK

422 *422A*
423 *423A*

2" Button, Green Illuminated Lens - Dull Stainless Steel Finish, Specify R for optional red lens

1 Gang	Contact	Sign	
422U	Momentary SPDT	PUSH TO EXIT	**64.00**
423U	Integrated 1-60 Sec Timer 12/24VDC, 2A SPDT Contact	PUSH TO EXIT	**124.00**

2" Button - Blue Illuminated lens only

422AU	Momentary SPDT	Symbol	**64.00**
423AU	Integrated 1-60 sec Timer 12/24VDC, 2A SPDT Contact	Symbol	**124.00**

CODE COMPLIANT MANUAL RELEASE DEVICES

List CK

NEW

413MN

Code Compliant Manual Releasing Devices and Sensors
413M and 413MN exit switches USED TOGETHER WITH the MD31D PIR sensor comply with manual releasing device and sensor device requirements for Access-Controlled Egress Doors per:
NFPA 101 - 7.2.1.6.2 NFPA 1 Uniform Fire Code - 14.5.3.2 BOCA National Building Code - 1017.4.5
SBCCI Standard Building Code - 1012.7 1017.4.5.

Code Compliant Manual Release Device
Code Compliant Features: Fixed 30 second timer, re-triggerable; Failsafe - lock releases when power to switch is interrupted; Sign - PUSH TO EXIT; CSFM Listed; Enterprise Engineering Laboratory Listed:

1¾"x1" Button, Green Illuminated Lens - Dull Stainless Steel Finish, Specify R for optional red lens

Narrow	Contact	Sign	
413MNU	Integrated Fixed 30 sec. Timer 12/24VDC, 2 Amp SPDT Output	PUSH TO EXIT	**130.00**

NEW

CSFM Listed EEL Listed

423M

2" Button, Green Illuminated Lens - Dull Stainless Steel Finish, Specify R for optional red lens

1 Gang	Contact	Sign	
423MU	Integrated Fixed 30 sec. Timer 12/24VDC, 2 Amp SPDT Output	PUSH TO EXIT	**130.00**

Code Compliant Egress Sensor
Code Compliant Features: PIR Egress Sensor with Failsafe Mode - lock releases when power to PIR sensor is interrupted. UL listed 294 Access Control System Units

MD31D-W

MD31D-B

UL LISTED

Model	Color		
MD31D-W	White	PIR Egress Sensor	**180.00**
MD31D-B	Black	PIR Egress Sensor	**180.00**

Input: 12 or 24 VAC/DC @ 26mA max.
Contact: 2 SPDT Dry, 2 Amp @ 30VDC (38.1 H x 148.8 W x 38.1 D mm)
Operating temp: -20° F to 120° F (-29° C to 49° C)
Dimensions: 1.5" H x 6.25" W x 1.5" D

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

430 SERIES - 1-1/2" MUSHROOM EXIT SWITCH

430

430N

1.5" Mushroom, Green Button Standard, Dull Stainless Steel Finish, Specify R For Optional Red Lens

1 Gang	Narrow	2 Gang	Contact	Sign	List	CK
431CU	431CNU		AA (**On/Off)** NC SPST	none	100.00	
431OU	431ONU		AA (**On/Off)** NO SPST	none	100.00	
432CU	432CNU		Momentary NC SPST	EXIT	100.00	
432OU	432ONU		Momentary NO SPST	EXIT	100.00	
432KU	432KNU		Latching/ key reset DPST	none	200.00	
		433U	with Timer Module 1-60 sec. 12/24V AC/DC SPDT 2A Contact	EXIT	160.00	
434U	434NU		Momentary DPST	EXIT	120.00	
435U	435NU		AA (On/Off) DPST	none	120.00	

441 - 444

440 SERIES - 2-5/8" MUSHROOM EXIT & PANIC SWITCHES

2-5/8" Mushroom, Red Button Standard, Dull Stainless Steel Finish, Specify G For Optional Green Lens

1 Gang	2 Gang	Contact	Sign	List	CK
	441U	AA (On/Off) DPST	none	160.00	
	442U	Momentary DPST	EXIT	160.00	
	443U	with Timer Module 1-60 sec. 12/24V AC/DC SPDT 2A Contact	EXIT	220.00	
	444U	Momentary 2-DPST	EXIT	196.00	
446U		Momentary DPST	EXIT	110.00	

446

450 SERIES - VANDAL RESISTANT STAINLESS STEEL EXIT SWITCH

451

451N

452

452N

Stainless Steel Button - 1/4" Thick Aluminum Plate - Security Screws - Plated Finish Not Available

1 Gang	Narrow	Contact	Sign	List	CK
451V	451NV	AA (On/Off) SPDT	none	140.00	
452V	452NV	Integrated Pneumatic Timer ADJ. 2-60 sec. SPDT contact	none	380.00	

460 SERIES - VANDAL RESISTANT STAINLESS STEEL EXIT SWITCH

460

NEW

Piezoelectric Stainless Steel Button - No moving parts - Integrated Time Delay - Red and Green Status Indicators
1/8" Stainless Steel - Security Screws - Plated Finish Not Available

1 Gang	Contact	Sign	List	CK
460U	Integrated 1-60 Sec Timer 12/24VDC, NO/NC 2A Contact	PUSH TO EXIT	170.00	

OPTIONS AND FINISHES

Options for 400, 410, 420, 430, 440 Series

		Add to List	CK
L1G	1 Green LED	16.00	
L1R	1 Red LED	16.00	
L2	1 Red And 1 Green LED	24.00	
L3	Tri-color LED - Red, Green, Amber	24.00	
E	Add Exit sign To AA Function Switch Only,	8.00	
B	No Exit sign (None) With Momentary Switch	N/C	

Special Finish
450 / 460 Special finish is not available
Designate special finish suffix from below in lieu of U (stainless steel) in part number.

C 605 Bright Brass	D 606 Dull Brass	F 611 Bright Bronze	40.00
G 612 Dull Bronze	H 613 Oil Rubbed Bronze	P 625 Bright Chrome	40.00

SURE EXIT® SENSE BAR — DKK

Listed 4J82
Access Control System Units
Burglary Resistant Electronic Locking Mechanism

3773-0324:105

"Security Industry Finest" ISC Expo

Standard Features

Actuation: Pressure Sense Technology; Tri-Failsafe
Voltage: 12/24VDC Voltage Sense Input
Current: 20 mA at Rest, 115 mA Active
Lock Output: SPDT, 3 Amp @ 30VDC
Alarm Shunt/Status Output: SPDT, 3 Amp @ 30VDC
Accessories Include: 10 Ft Cable and Connector; PT-2U Armored Power Transfer Loop

Standard for 36" Wide Door

MODEL	FINISH	LIST PRICE
PSB560V	628 Aluminum Anodized	320.00
PSB560X	313 Dark Bronze Anodized	330.00
PSB560Y	335 Black Anodized	330.00
PSB560C	605 Bright Brass	445.00
PSB560S	629 Bright Stainless Steel	445.00
PSB560U	630 Brushed Stainless Steel	445.00

ACCESSORIES		ADD TO LIST
500GL-KIT	Glass door mounting kit	220.00
500GL-MB	Glass door mounting blocks (2)	120.00
Bars for wide doors	Add "42" or "48" for longer bar. May be field cut. *Ex: PSB560V-42*	N/C

EXIT MECHANICAL SWITCH — DK

Listed 4J82
Access Control System Units
Burglary Resistant Electronic Locking Mechanism

3773-0324:106

Standard Features

Actuation: 1/8" total bar movement for mechanical switch actuation
Contact: SPDT, 5 Amp @ 30VDC (2nd switch optional)

Standard for 36" Wide Door

MODEL	FINISH	LIST PRICE
MSB550V	628 Aluminum Anodized	190.00
MSB550X	313 Dark Bronze Anodized	200.00
MSB550Y	335 Black Anodized	200.00
MSB550C	605 Bright Brass	315.00
MSB550S	629 Bright Stainless Steel	315.00
MSB550U	630 Brushed Stainless Steel	315.00

ACCESSORIES		ADD TO LIST
500GL-KIT	Glass door mounting kit	220.00
500GL-MB	Glass door mounting blocks (2)	120.00
Bars for wide doors	Add "42" or "48" for longer bar. May be field cut. *Ex: MSB550V-42*	N/C
2nd Mechanical Switch	Add "2" for 2nd mechanical switch for dual-failsafe redundant operation; alarm shunt; or monitoring output. *Ex: MSB550-2V*	20.00



OPTIONS — Add to List

MSB550 and PSB560

500-SK	Shim kit used to raise bar from door. Recommended for wood or hollow metal doors with uneven mounting surface.	24.00

Power Transfer: Specified with MSB550 only

PT-2U	Stainless steel armored loop	16.00
PT-3V	Stainless steel armored loop with aluminum surface wire junction	36.00

Standard Installation with standard mounting hardware



500GL Kit Glass Mount Installation

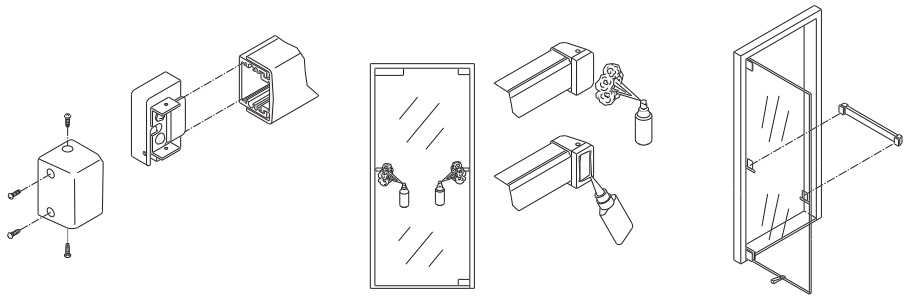

1. Assemble kit
2. Apply Adhesive
3. Mount

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

APPLICATION

- **Activation of delayed egress locks**
- **Request-to-Exit**
- **Electromagnetic Lock Release**
- **Alarm Shunt or Alarm Activation**



510

511

512

514

516



517

518

519



525

527

528

SWITCH KITS LIST

Switch Kits are field installed in the inactive hinge pad of an exit device to provide instantaneous release of EmLocks for egress. All kits include a SPDT Switch Assembly with wire leads. 5 Amp @ 30VDC.

MODEL	MAKE & MODEL TO BE MODIFIED	
510	Von Duprin 33, 35, 98, 99	**72.00**
510-2	Von Duprin 33, 35, 98, 99 DPDT	**90.00**
511	Von Duprin 55	**72.00**
512	Von Duprin 88	**132.00**
514	Dor-O-Matic 990, 1090, 1990, 2090	**150.00**
516	Sargent 9600, 9700, 9800, 9900	**72.00**
517	Adams Rite 8300, 8400, 8700, 8800	**84.00**
518	Precision Apex Series	**84.00**
519	Jackson 1095	**90.00**
519-2	Jackson 1095 DPDT	**108.00**
521	Corbin 4000	**72.00**
525	Monarch 18 and 19	**96.00**
527	Sargent 80	**90.00**
527-2	Sargent 80 DPDT	**126.00**
528	Sargent 20/60	**174.00**
531	Yale 7000 (Dogging mechanism required)	**72.00**
535	Kawneer Mid Panel Line Dor-O-Matic 1390	**64.00**
540	Arrow 53/5400 series	**72.00**

NOTE: Consult factory for Exit Device Switch Kits not shown. Modification of any kind to a UL Listed device my void UL Listing.

MS-12

MS-14

MS-16

MS-18

MS-20

MONITOR STRIKES LIST

5 Amp @ 30 VAC/DC

MS-12	Cylindrical latch monitor 2-3/4" SPDT	**80.00**
MS-12D	Cylindrical latch monitor 2-3/4" DPDT	**110.00**
MS-14	Cylindrical latch monitor 4-7/8" SPDT	**80.00**
MS-14D	Cylindrical latch monitor 4-7/8" DPDT	**120.00**
MS-16	Mortise lock latch monitor SPDT	**90.00**
MS-16D	Mortise lock latch monitor DPDT	**120.00**
MS-18	Mortise lock deadbolt monitor SPDT	**80.00**
MS-18D	Mortise lock deadbolt monitor DPDT	**120.00**
MS-20*	Mortise lock latch and deadbolt monitor SPDT	**110.00**
MS-20D*	Mortise lock latch and deadbolt monitor DPDT	**160.00**

***MS-20 and MS-20D are handed but reversible**

Price List Effective January 1, 2006

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

"BREAK GLASS" EMERGENCY DOOR RELEASE

c UL us LISTED

		List	V
491	Emergency door release DPDT switch with siren 3V-28VDC, 18 mA	**184.00**	
491-BB	Surface box	**53.00**	
491-GL4	Replacement glass, 4 each	**20.00**	

491

EMERGENCY ACCESS PANEL

		List	CK
APB1000A	Emergency access panel for lobby door system. Mushroom button with key reset and siren	**350.00**	

APB1000A

WALL MOUNT ANNUNCIATOR

		List	CK
400-L2	Two LEDs. Specify lens color.	**40.00**	
400-L3	Three LEDs. Specify lens color.	**48.00**	
400-LT1	One tri-color LED. Red, Green and Amber.	**40.00**	
400-LT2	Two tri-color LED. Red, Green and Amber.	**50.00**	

SIRENS AND BUZZERS

		List	CK
400-RMB	Buzzer on 1 gang plate. Specify 12VDC or 24VDC, 20mA max	**36.00**	
400N-RMB	Buzzer on narrow plate. Specify 12VDC or 24VDC, 20mA max	**36.00**	
400-SN	Siren on 1 gang plate, 3 - 28VDC, 18mA max	**50.00**	
400N-SN	Siren on narrow plate, 3 - 28VDC, 18mA max)	**50.00**	

400-SN

400-RMB

COMMUNICATING BATHROOM CONTROLS

		List	CK
EmLock® or Bolt Lock Application			
CB401-A	Communicating bath switch, **U** 630 Stainless steel finish.	**80.00**	
CB401-B	Emergency access switch, Red. 2 Required	**80.00**	
CB701	Emergency key switch	**150.00**	
HiTower® Application			
CB402-A	Communicating bath switch, **U** 630 Stainless steel finish.	**80.00**	
CB402-B	Emergency access switch, Red. 2 Required	**80.00**	
CB702	Emergency key switch	**150.00**	

CB401-A
CB402-A

CB401-B
CB402-B

Reference page 3 for system operation and component requirements

DESK SWITCH IN COMPACT BOX

		List	DK
15-1	AA, SPDT push switch 6 Amp @ 30VAC/DC	**66.00**	
15-2	MO, SPDT push switch 10 Amp @ 30VAC/DC	**66.00**	
15-3	AA, SPDT toggle switch 6 Amp @ 30VAC/DC	**66.00**	

15-2

Add $32.00 for each additional switch

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

TIME DELAY RELAY

	List	CK

Time Delay Relays

10TD	Time delay relay module with adjustable 1-60 second relock delay. **Input:** 12/24V AC/DC **Output:** SPDT, dry contact **Voltage:** 2 Amps @ 30 VDC *(resistive)* **Size:** 2-1/4"x 1-1/2" x 3/4"	**60.00**

TIMERS

	List	CK

14-2	7 day programmable timer with memory battery back-up capability **Output:** 1 SPDT, dry contact **Voltage:** 16 Amps @ 30 VAC/DC Specify 12V AC/DC or 24 AC/DC	**200.00**

PASSIVE INFRARED EGRESS CONTROL

	List	V

MD-31D-W	Motion detector with time delay, white	**180.00**
MD-31D-B	Motion detector with time delay , black	**180.00**

PTH SERIES POWER TRANSFER HINGE

UL US LISTED

	List	LSK

PTH

UL10B Listed for
3 hr fire rated Doors
See Details Page 14

PTH-4Q	Four (4) Conductor Power Transfer Hinge 28 gauge - 1 pair 1 Amp, 1-pair 250 mA 4.5" x 4.5" standard weight, 626 Dull Chrome	**150.00**
PTH-4Q-DPS	Four (4) Conductor Power Transfer Hinge with Door Status Contact 28 gauge - 1-pair 1 Amp, 1-pair 250 mA @ 12/24V AC/DC Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	**186.00**
PTH-10Q	Ten (10) Conductor Power Transfer Hinge 30 gauge - 1-pair 1 Amp, 4-pair 250 mA 4.5" x 4.5" standard weight, 626 Dull Chrome	**195.00**
PTH-10Q-DPS	Ten (10) Conductor Power Transfer Hinge with Door Status Contact 30 gauge - 1-pair 1 Amp, 4-pair 250 mA Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	**226.00**

POWER TRANSFER DEVICES

	List	V



PT-5

PT-2

PT-3

PT-2U	Armored flex conduit, less wires, 18" long	**16.00**
PT-3V	Armored flex conduit, less wires, with wire junction box	**36.00**
PT-5	Concealed power transfer	**60.00**

DOOR POSITION SENSORS

	List	V

DPS-11
DPS-11-2

MC-4



MC-4M

DPS-11	Adjustable ball type SPDT 5 Amp	**40.00**
DPS-11-2	Adjustable ball type 2 SPDT 5 Amp	**60.00**
MC-4	Recessed magnetic (3/4", SPDT, 30VDC, 50mA)	**24.00**
MC-4M	Recessed magnetic mounted on 1-1/4" x 4-7/8" plate	**60.00**
MC-7	Biased high security recessed magnetic (1", SPDT, 30VDC, 50mA)	**60.00**

Price List Effective January 1, 2006

SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

MINI CONSOLES

	List	WK

Mini Consoles provide control for one or two doors. Momentary or maintained push button switches with Tri-Color LED indicators.

Dimensions: 4-1/8" W x 3-1/8" H x 6-1/4" L
Color: Beige
Contacts: 5 Amp @ 30VDC
Power: 24VDC @ 0.02 Amp required for each LED

DTMO-2 *DTMO-1*

DTMO-1	One momentary switch and one LED	**154.00**
DTMO-2	Two momentary switches and two LED's	**198.00**
DTMOMA-2	One momentary, one maintained switch and two LED's	**200.00**
DTMA-2	Two maintained switches and two LED's	**198.00**

MODULAR CONTROL CONSOLES

	List	WK

TCC AL8 AL4E

RCC AL8 AL8 AL4E

TCC	Slope front desk top console 12 stations maximum when using 2 control panels. Base unit, less panel. Color: black sides and beige top Dimensions: 10-1/4"W x 4-3/4"H x 9-5/8"D	**270.00**
RCC	Rack mount console. 24 stations maximum when using three control panels. *(Maximum is 20 stations with "E" panel)* Base unit, less panels. Color: Beige Dimensions: 19"W x 5-1/4"H x 6"D	**996.00**

Chassis less switches and light panels.

SPECIFY SWITCH AND INDICATOR PANELS

		Add to List

Rocker Switch Rating: 3 Amp @ 30VDC **Power Required per LED**: 24VDC @ 0.02 Amp

AL4	Four momentary switches with LEDs	**500.00**
BL4	Four maintained switches with LEDs	**500.00**
CL4	Four momentary/off/maintained switches with LEDs	**500.00**
DL4	Four momentary/off/momentary switches with LEDs	**500.00**

AL8	Eight momentary switches with LEDs	**940.00**
BL8	Eight maintained switches with LEDs	**940.00**
CL8	Eight momentary/off/maintained switches with LEDs	**940.00**
DL8	Eight momentary/off/momentary switches with LEDs	**940.00**

AL4E	Four momentary switches with LEDs, alarm, reset push button and key lock	**540.00**
BL4E	Four maintained switches with LEDs, alarm reset push button and key lock	**540.00**
CL4E	Four momentary/off/maintained switches with LEDs, alarm, reset push button and key lock	**540.00**
DL4E	Four momentary/off/momentary switches with LEDs, alarm, reset push button and key lock	**540.00**

EA

F

EA	Panel with alarm, reset push button and key lock	**120.00**
F	Blank panel	**28.00**

CABINETS

	Add to List

CAB7	Black cabinet for one RCC 7"H x 20-1/2"W x 14-1/2"D	**800.00**
CAB12	Black cabinet for two RCC 12-1/2"H x 20-1/2"W x 14-1/2"D	**1,000.00**

SDC
SECURITY DOOR CONTROLS
3580 Willow Lane • Westlake Village, CA 91361
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective January 1, 2006

www.SDCsecurity.com

Online System Design Wizard and Product Manager

Las Vegas 2005

NPS

Product Achievement Award for: Business Services

SIA NEW PRODUCT SHOWCASE

SDC has created the most advanced manufacturers website in the industry. SDC customers and industry professionals can not only specify products and create systems, but also have the ability to save, manage, modify, quote and share product and access control system information with other professionals

System Design Wizard

- Model Number Generator
- Automated Pricing
- Automated Document Retrieval
- Temporary Folder to Sort by Product Type or Door Opening

Product Manager

- Save Multiple Project Folders Online
- Organize Subfolders by Door Opening
- Generate and Send Quotes
- Generate and Send Request-For-Quote
- Share and Download Project Reports
- Share and Download Project Documents
- Share and Download Project Quotes

ALOA Associated Locksmiths of America Associate Member®

dhi Door and Hardware Institute MEMBER

SIA Security Industry Association MEMBER

BHMA MEMBER

BSI REGISTERED ISO 9001 : 2000 FM 52705

3580 Willow Lane, Westlake Village, CA 91361-4921
P.O. Box 6219, Westlake Village, CA 91356-6219

©2006 Security Door Controls